

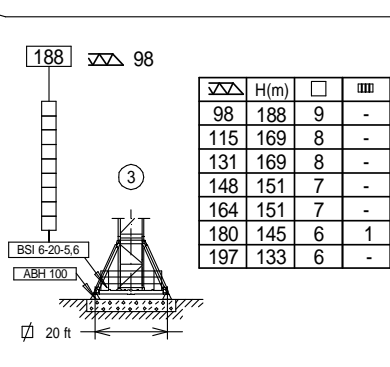




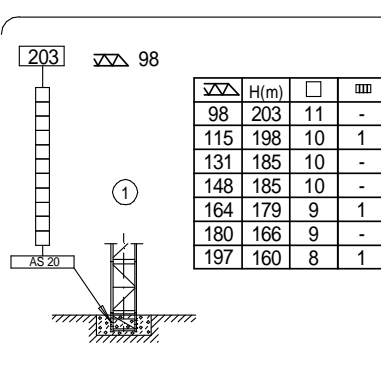


(H) TRASLACIÓN / TRAVELLING


(H) ESTACIONARIA / STATIONARY

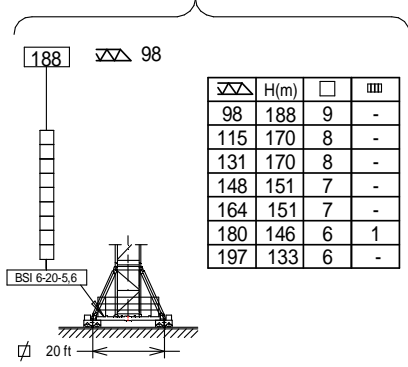

- ▣ TS 20
- TS 20-5,6
- ▣ TSR 20-5,6A
- ⊠ TSR 20-5,6

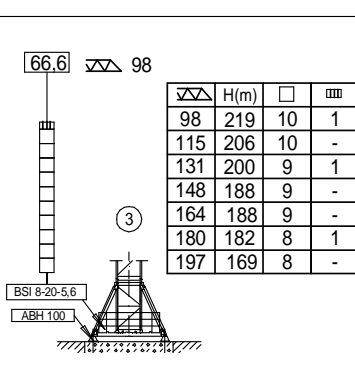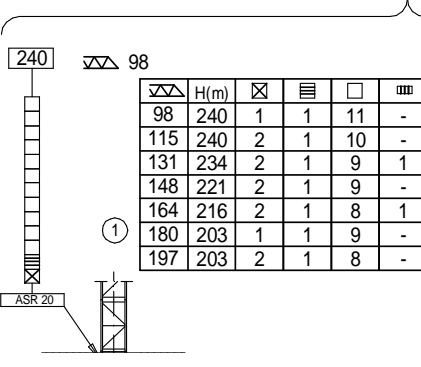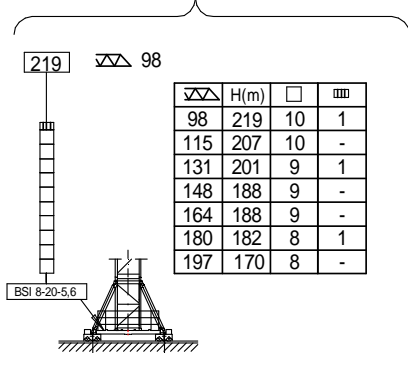

TREPADO / CLIMBING

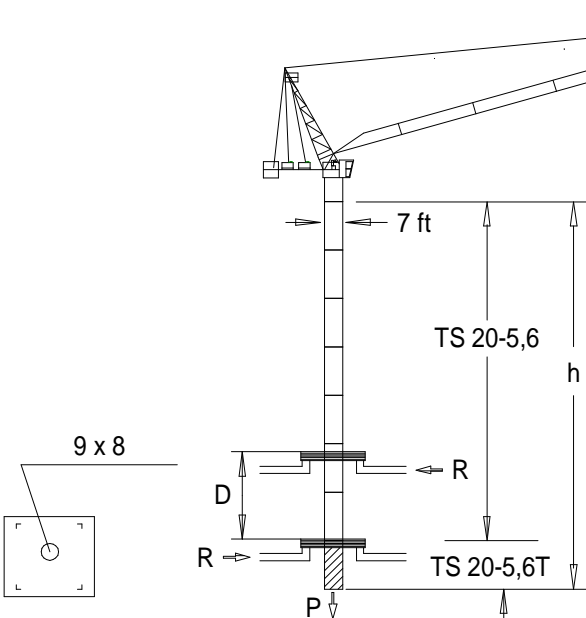

$h_{max}$ : TS 20-5,6T + 5xTS 20-5,6

	▶	■
197 ft		
h (ft)	111	
D (ft)	50 - 56	
P (lbf)	238700	211800
Rmax (lbf)	56900	68300

TS20-5,6T: 160.32.600

	Trepado interno / Internal climbing
--	-------------------------------------

Viento fuera de servicio / Out of service wind

Consultar / Consult



En servicio / In service



Fuera de servicio / Out of service
















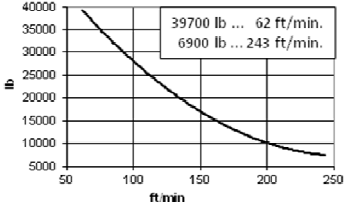
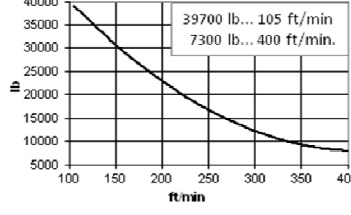


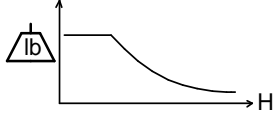
Fecha / Date: 08/02/2017












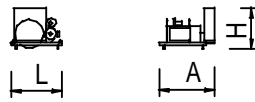

FEM 1001


 TD [lb]	TD 13200 lb @ (ft)	Cargas máximas / Maximum loads TD – 13200 lb							
		Alcance del gancho [ft] / Hook reach [ft]							
		82	98	115	131	148	164	180	197
197 ft	136	13200	13200	13200	13200	11200	8600	6600	4900
180 ft	140	13200	13200	13200	13200	11900	9500	7300	—
164 ft	142	13200	13200	13200	13200	12100	9700	—	—
148 ft	144	13200	13200	13200	13200	12600	—	—	—
131 ft	131	13200	13200	13200	13200	—	—	—	—
115 ft	115	13200	13200	13200	—	—	—	—	—
98 ft	98	13200	13200	—	—	—	—	—	—

 TD/2R/3R (lb)	3R 39700 lb @...[ft]	2R 26500 lb @...[ft]	TD 13200 lb @...[ft]	Cargas máximas / Maximum loads TD/2R/3R – 13200 / 26500 / 39700 lb								
				Alcance del gancho [ft] / Hook reach [ft]								
				66	82	98	115	131	148	164	180	197
197 ft		90	135	26500	26500	23100	17900	13900	10800	8400	6200	4400
180 ft		92	138	26500	26500	23600	18500	14600	11500	9000	6800	—
164 ft	69	92	140	39700	31300	24000	18700	15000	11900	9300	—	—
148 ft	69	93	141	39700	31300	24300	19200	15200	12100	—	—	—
131 ft	69	94	131	39700	31800	24700	19600	15700	—	—	—	—
115 ft	69	94	115	39700	32000	24900	19800	—	—	—	—	—
98 ft	70	95	98	39700	32400	25400	—	—	—	—	—	—

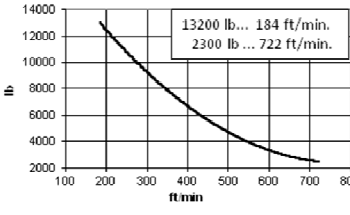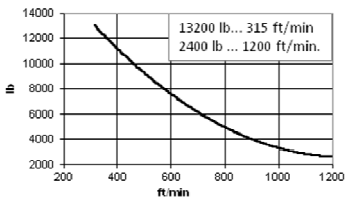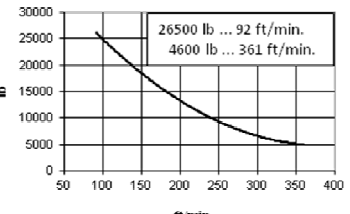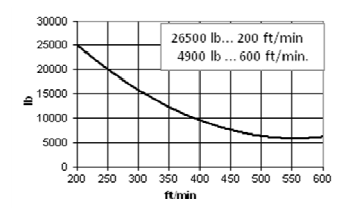

<p>*opcional *optional</p>												
	<p><b>EC88110VF</b> <b>65 kW</b></p>	<p><b>*EC150185VF</b> <b>110 kW</b></p>	<p><b>TG2020VF</b> <b>2x7,3 kW</b></p>	<p><b>OG1507VF</b> <b>2x5,5 kW</b></p>	<p><b>EP6015VF</b> <b>44,1 kW</b></p>	<p><b>TH2006</b> <b>15 kW</b></p>						
			<p>0...66 ft/min</p>	<p>0...0,8 r/min sl/min</p>	<p>1,5 min</p>	<p>2 ft/min</p>						
			 <b>480V 60Hz</b>  <b>EC88110VF: AMPERAGE = 203 A</b>  <b>EC150185VF: AMPERAGE = 263 A</b>									
					<p>H ≤</p> <table border="0"> <tr> <td>TD</td> <td>2067 ft</td> </tr> <tr> <td>2R</td> <td>1033 ft</td> </tr> <tr> <td>3R</td> <td>689 ft</td> </tr> </table>		TD	2067 ft	2R	1033 ft	3R	689 ft
TD	2067 ft											
2R	1033 ft											
3R	689 ft											
												


DENOMINACIÓN / DENOMINATION		L [ft]	A [ft]	H [ft]	P / W [lb]	
Torre inferior <i>Lower tower</i>	TSI20-5,6		19.6	7.6	7.8	11880
Torre <i>Tower</i>	TS20		13.9	7.7	7.7	5900
	TS20-5,6		19.6	7.6	7.8	7950
	TSR20-5,6A		19.4	7.8	7.6	8020
	TSR20-5,6		19.7	7.4	7.4	9400
	TR24-5,6		19.7	9.1	9.3	10200
Torre asiento pista + base punta de torre + orientación <i>Slewing table + tower head base + slewing mechanism</i>			19.4	8.8	101.2	22500
Punta de torre + pasteca <i>Tower head +reeving block</i>			38.3	6.3	6.7	13200
Tramo de pluma <i>Jib section</i>	(I)		30.3	6.9	5.8	3500
	(II)		33.5	4.2	5.3	3300
	(III)		33.5	4.2	5.2	3000
	(IV)		33.5	4.2	5.2	2700
	(V)		33.5	4.2	5.2	2600
	(VI)		17.4	4.2	5.2	1500
	(VII)		17.4	4.2	5.3	2000
Punta de pluma <i>Jib end</i>			11.2	5.2	11.8	1940
Polipasto <i>Hook assembly</i>			3.0	1.3	4.0	970
Tirante sostén pluma <i>Jib support tie</i>			19.2	1.2	1.2	2500
Estructura contrapluma <i>Counterjib structure</i>			25.5	6.3	2.4	3200
Contrapluma con mecanismos <i>Counterjib with mechanisms</i>			25.5	7.3	7.8	26000
Plataforma y cabina <i>Platform and cabin</i>			11.2	6.8	7.9	2400
Mecanismos <i>Mechanisms</i>	Elevación carga / <i>Hoisting /</i>		7.9	6.8	6.8	13700
	Elevación pluma / <i>Luffing</i>		6.5	7.7	6.2	7100
Transporte torre de montaje <i>Jacking cage transport</i>	TM 20PAL-5,6		31.3	6.8	8.3	12500

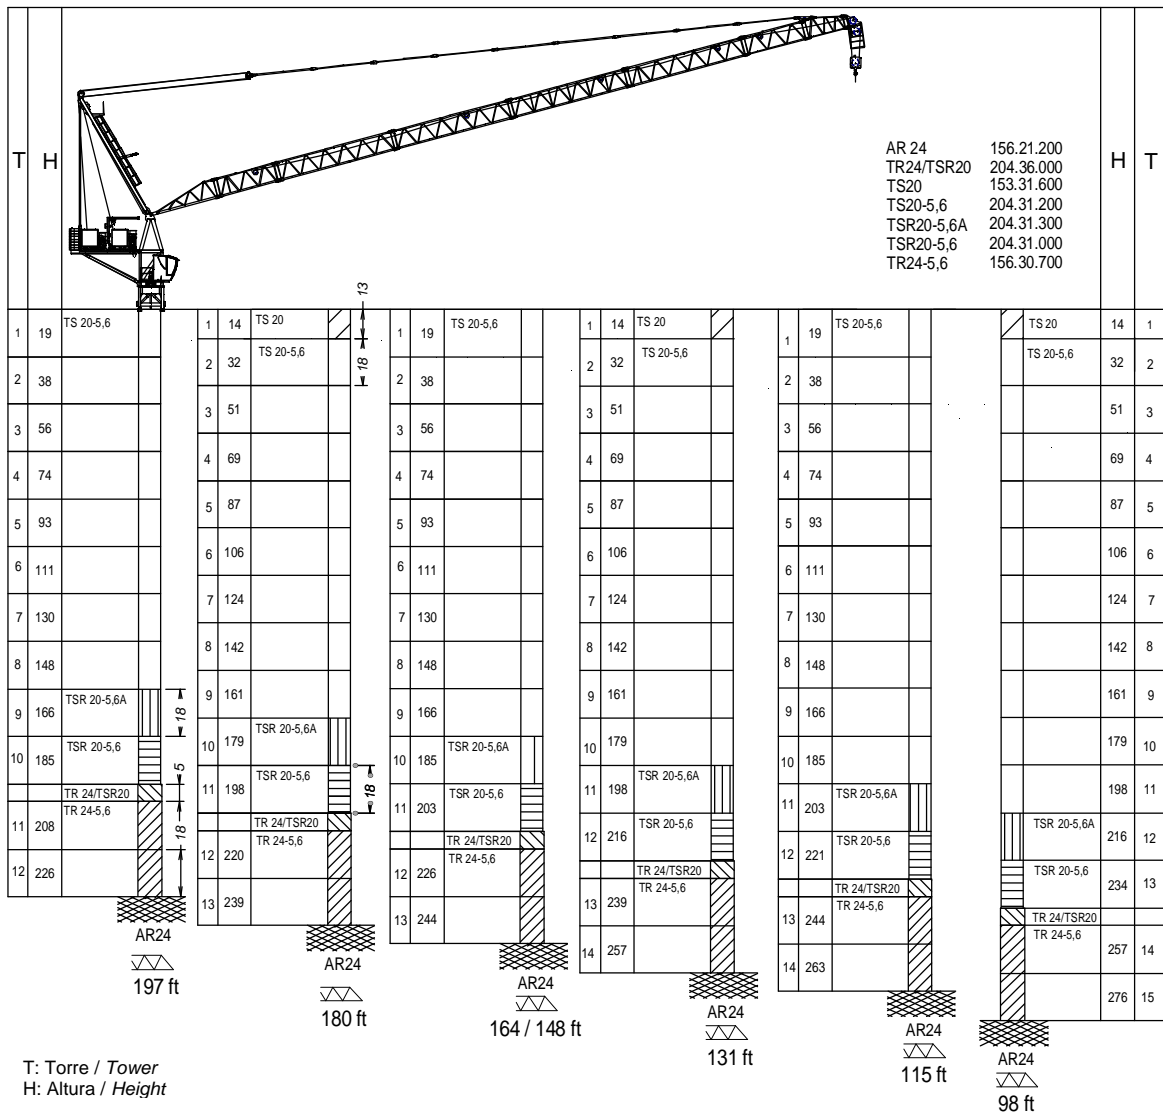

Otras configuraciones de torre / Other tower configuration

TREPADO / CLIMBING

J265PA



H = 161 ft + + AS20

8 x



7 x

HIGH CUBE 40'

+ 1 x

FLAT RACK 40'

Ancho 7.9 ft wide



Ctra./Rd. Madrid - Irún Km. 415 - 20.213 IDIAZABAL [Gipuzkoa] ESPAÑA / SPAIN  
 P.O. Box, 23 - 20.200 BEASAIN - E-mail: jaso@jaso.com  
 Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20  
**www.jaso.com**

Fecha / Date: 08/02/2017

FEM 1001

DELEGACION / DEALER