

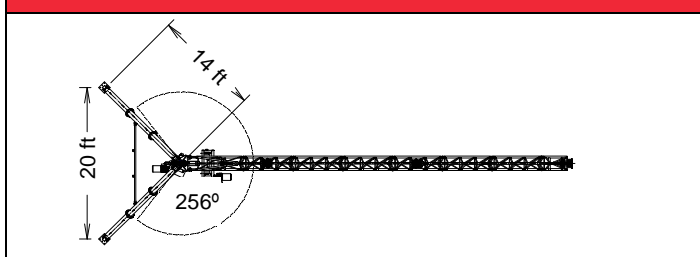
CARGAS / LOADS

J1920.DC

⚙ / ⚙		TD/2R (lb)	Cargas máximas / Maximum loads TD/2R (lb)		
 [ft]	2R 8800 lb [ft]	TD 4400 lb [ft]	Alcance del gancho [ft] / Hook reach [ft]		
			49	56	62
		62	62	4400	4400
56		56	4400	-	
49	49	49	8800	-	
 [ft]	2R 6600 lb [ft]	Alcance del gancho [ft] / Hook reach [ft]			
		56	6600	6600	-

(H) ESTACIONARIA / STATIONARY

TRANSPORTE / TRANSPORT










Transporte grúa completa / Transport of whole crane

Caja marítima / Liftvan



















9.5 x 7.4 x 7.4 ft – 880 lb
Derrick – 10600 lb



124 mph	49 ft
109 mph	56 ft
96 mph	62 ft

CARACTERÍSTICAS DE MECANISMOS / MECHANISMS FEATURES
J1920.DC

		 EC1040VF 7,5 kW		 OG604VF 2 x 2,2 kW	 EP1015VF 7,5 kW
	lb ft/min	2200 0...131	4400 0...66	0...0,4 r/min sl/min	1,5 min
	lb ft/min	4400 0...66	8800 0...33		
 $H \leq$		TD 2R	1600 ft 800 ft	 400V 50Hz AMPERAGE = 21 A	

LISTA DE EMBARQUE / PACKING LIST
J1920.DC

DENOMINACIÓN / DENOMINATION	L (ft)	A (ft)	H (ft)	P / W (lb)	
Base punta de torre+orientacion / tower head base + slewing		2.48	3.28	2.66	1127
Torre asiento pista / Slewing table		1.28	2.21	2.21	256
Tramo de pluma - Torre / Jib section - Tower		6.98	2.22	2.56	291
Tramo de pluma I / Jib section I / Tronçon d		6.89	1.89	2.25	198
Punta de pluma / Jib end		3.85	1.89	4.53	293
Torre inferior / Lower tower		6.89	1.89	2.25	229
Torre superior / Top tower		3.61	1.88	2.23	112
Punta de torre / Tower head		3.61	2.08	2.07	390
Puntal / Pillar		6.40	-	1.15	205
		5.86	-	1.15	212
Plumín / Auxiliary jib		10.96	-	1.57	128
Polipasto / Hook assembly		1.18	1.32	2.91	421
Pasteca / Reeving block		1.23	1.48	1.54	159
Larguero inferior / Lower crossbar		13.05	-	1.05	115
Elevación carga / Hoisting		4.21	4.10	1.80	941
Elevación pluma / Luffing		1.94	3.88	1.76	617
Limitador sobrecarga / Overload limiter		1.03	1.24	1.11	62
Armario electrico / Electrical cupboard		1.18	2.09	3.23	198

	
124 mph	49 ft
109 mph	56 ft
96 mph	62 ft



Ctra./Rd. Madrid - Irún Km. 415 - 20.213 IDIAZABAL [Gipuzkoa] ESPAÑA / SPAIN

P.O. Box, 23 - 20.200 BEASAIN - E-mail: jaso@jaso.com

 Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20 www.jaso.com

Fecha / Date: 21/01/2.021

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability

DELEGACION / DEALER