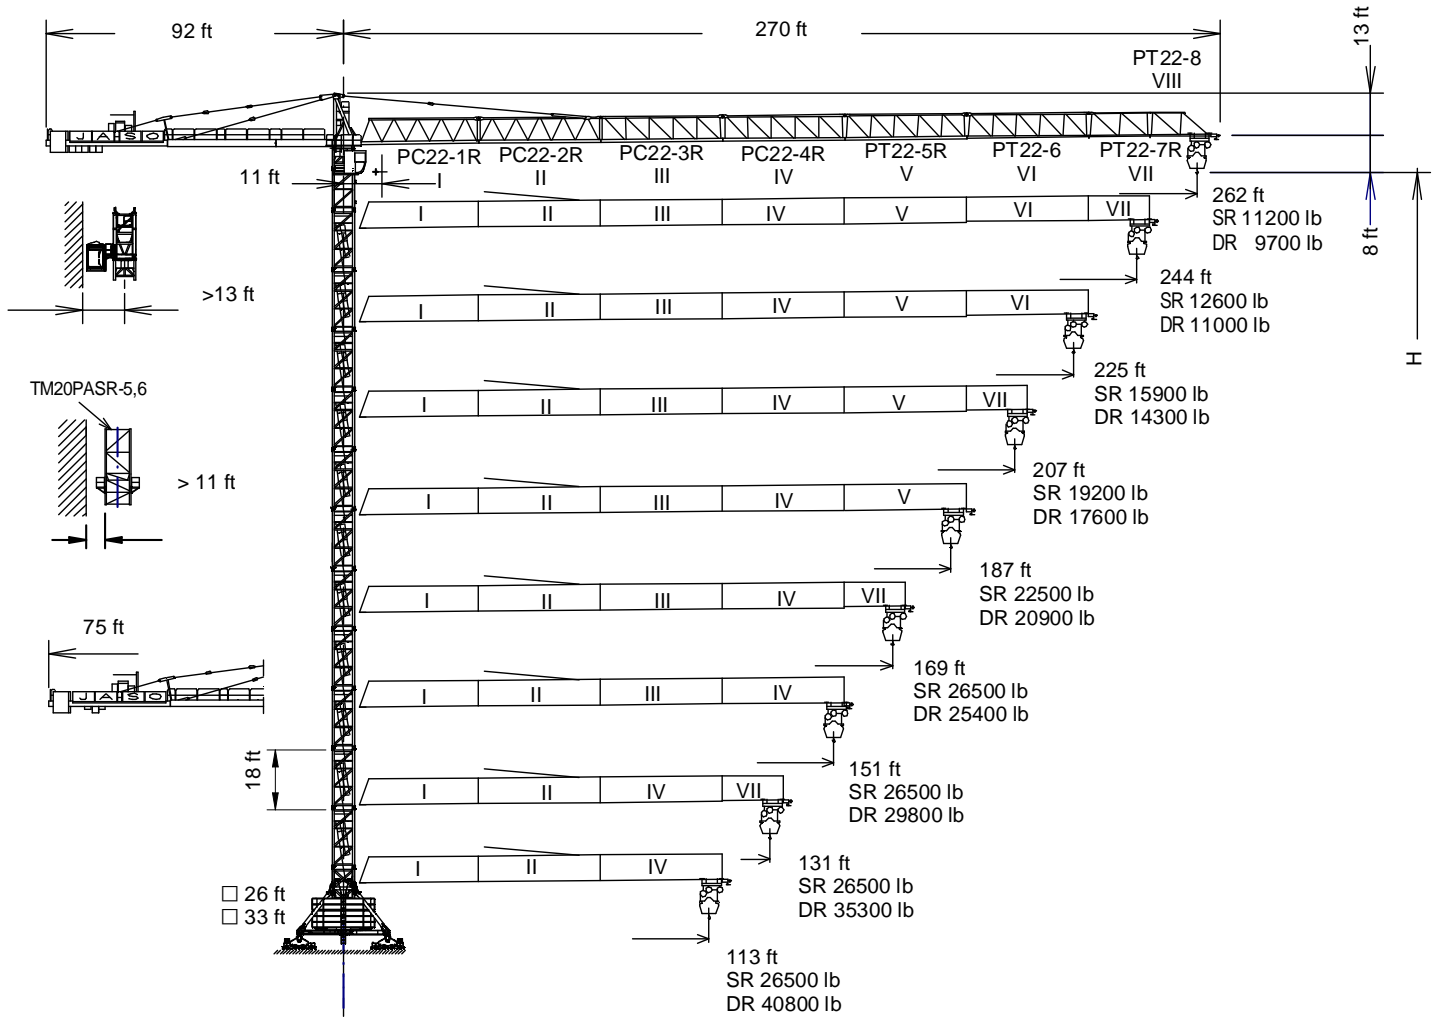


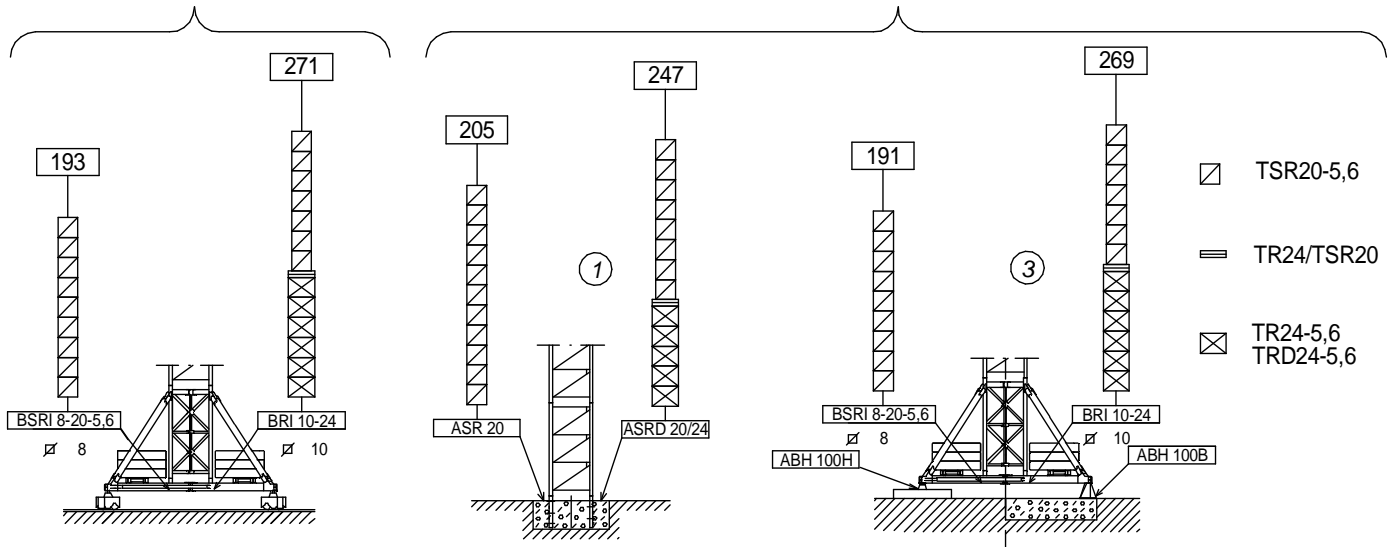
CE EN 14439 C25

UNE-EN-ISO 9001



(H) TRASLACIÓN / TRAVELLING

(H) ESTACIONARIA / STATIONARY



Fecha / Date: 08/02/2017



FEM 1005 - C25





Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability

**CARGAS / LOADS**
















**J600.24.A**

 ST-SR (lb)		Cargas máximas / Maximum loads <b>Single Trolley – Single Reeving – 26500 lb</b>										
 [ft]	26500 lb @ ... (ft)	Alcance del gancho [ft] / Hook reach [ft]										
		82	98	113	131	151	169	187	207	225	244	262
262	133	26500	26500	26500	26500	22800	19900	17500	15500	13800	12400	11200
244	134	26500	26500	26500	26500	23000	20100	17700	15700	14000	12600	—
225	148	26500	26500	26500	26500	25800	22600	20000	17600	15900	—	—
207	158	26500	26500	26500	26500	26500	24400	21600	19200	—	—	—
187	163	26500	26500	26500	26500	26500	25400	22500	—	—	—	—
169	169	26500	26500	26500	26500	26500	26500	—	—	—	—	—
151	151	26500	26500	26500	26500	26500	—	—	—	—	—	—
131	131	26500	26500	26500	26500	—	—	—	—	—	—	—
113	113	26500	26500	26500	—	—	—	—	—	—	—	—

 ST - DR [lb]		Cargas máximas / Maximum loads <b>Single Trolley – Double Reeving – 52900 lb</b>										
 [ft]	52900 lb @ ... (ft)	Alcance del gancho [ft] / Hook reach [ft]										
		82	98	113	131	151	169	187	207	225	244	262
262	68	43100	35000	29700	24900	20900	18100	15800	13800	12200	10800	9700
244	69	43700	35500	30100	25200	21200	18400	16100	14000	12500	11000	—
225	76	48800	39700	33800	28400	24000	20900	18300	16100	14300	—	—
207	82	52800	43100	36700	30900	26200	22800	20100	17600	—	—	—
187	85	52900	44700	38200	32200	27200	23800	20900	—	—	—	—
169	89	52900	47400	40500	34200	29000	25400	—	—	—	—	—
151	91	52900	48500	41500	35000	29800	—	—	—	—	—	—
131	92	52900	48900	41800	35300	—	—	—	—	—	—	—
113	92	52900	47700	40800	—	—	—	—	—	—	—	—

**CARACTERISTICAS DE MECANISMOS / MECHANISMS**

**J600.24.A**















*opcional *optional						
	<b>EC88110VF</b> 65 kW	<b>*EC150185VF</b> 110 kW	<b>TG4025VFJ600</b> 4 x 7,5 kW	<b>OG4006VF</b> 4 x 7,5 kW	<b>TC15105VF</b> 11 kW	<b>TH4010</b> 29,4 kW
			0...82 ft/min	0...0,8 r/min sl/min	26500 0...344 ft/min  52900 ft 0...171 ft/min	1.9 ft/min
			 480V 60Hz <b>EC88110VF: AMPERAGE = 182 A</b> <b>EC150185VF: AMPERAGE = 241 A</b>			
	$H \leq \begin{matrix} \text{SR} \\ \text{DR} \end{matrix}$		1430 ft 715 ft			




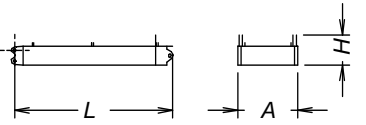

Fecha / Date: 08/02/2017

 **FEM 1005 –C25**

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability

LISTA DE EMBARQUE / PACKING LIST			J600.24.A			
DENOMINACIÓN / DENOMINATION			L [ft]	A [ft]	H [ft]	P / W [lb]
Torre inferior Lower tower	TSRI 20-5,6		19.7	7.4	7.4	14500
Torre desmontada Dismantled tower	TRD24-5,6		19.7	3.8	8.3	11370
Torre Tower	TSR20 TSR20-5,6 TR24-5,6		14.0 19.7 19.7	7.4 7.4 9.1	7.4 7.4 9.3	6900 9400 10200
Larguero largo, reducción Long crossbar, reduction	TR24/TSR20		13.0	2.0	6.0	5000
Larguero corto reducción Short crossbar, reduction	TR24/TSR20		6.3	2.0	6.0	2300
Torre asiento pista + base punta de torre + orientación Slewing table + tower head base + slewing mechanism			15.4	8.1	8.4	27200
Punta de torre Tower head			14.3	7.3	6.6	9500
Conjunto asiento pista, punta de torre y orientación Slewing table assembly, tower head and slewing mechanism			26.7	8.2	8.4	36700
Tramo de pluma Jib section	PC22-1R (I)		38.2	7.3	8.2	11240
	PC22-2R (II)		38.5	7.1	8.1	12680
	PC22-3R (III)		38.5	6.8	8.1	13120
	PC22-4R (IV)		38.5	6.8	8.1	11350
	PT22-5R (V)		38.5	6.8	8.1	6500
	PT22-6 (VI)		38.5	6.8	8.1	4370
	PT22-7R (VII)		19.4	6.8	8.0	2430
	PT22-8 (VIII)		19.2	6.8	7.9	1500
Polipasto Hook assembly	ST/DR		6.8	2.3	4.5	2470
Carro Trolley	ST/DR		10.7	7.6	7.2	3010
Plataforma y cabina Platform and cabin			12.7	7.3	8.2	2560
Contrapluma con plataformas Counterjib with platforms			37.8	11.2	7.6	20170

**LISTA DE EMBARQUE / PACKING LIST** **J600.24.A**

DENOMINACIÓN / DENOMINATION	L [ft]	A [ft]	H [ft]	P / W [lb]		
Prolongación larga de contrapluma con plataformas <i>Large counterjib extension with platforms</i> 	34.0	6.6	2.9	8900		
Prolongación contrapluma con plataforma / <i>Counterjib extension with platform</i> 	18.0	6.6	3.1	5400		
Soporte y elevación (sin cable) / <i>Support and hoisting (without rope)</i> 	8.2	6.9	4.1	7330		
Transporte torre de montaje <i>Jacking cage transport</i>	TM20PASR-5,6		35.5	7.5	7.9	26800

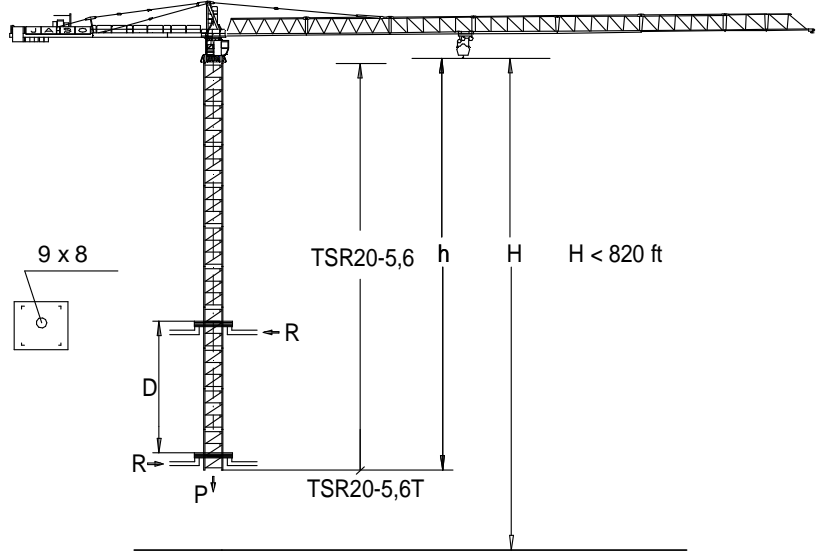
**LASTRES INFERIORES / LOWER BALLASTS** **J600.24.A**

<b>BRI 10-24</b>	H (ft)	198	271
	P (lb)	105800	211600
<b>BSRI 8-20-5,6</b>	H (ft)	138	193
	P (lb)	185200	264600




H: Altura bajo gancho / *Height under hook*

Para alturas intermedias tomar el lastre correspondiente a la altura superior / *For intermediate heights take the ballast corresponding to the higher height*


**TREPADO / CLIMBING** **J600.24.A**





$h_{max} = \text{TSR20-5,6T} + 7 \times \text{TSR20-5,6}$


		
169 ft	147	47.5 - 69
h (ft)	147	
D (ft)	47.5 - 69	
P (lbf)	369800	315900
Rmax (lbf)	79800	160700

TSR20-5,6T: 204.31.700

 Trepado interno / *Internal climbing.*

 Viento fuera de servicio / *Out of service wind*

 Consultar / *Consult*

 En servicio / *In service*

 Fuera de servicio / *Out of service*



Ctra./Rd. Madrid - Irún Km. 415 - 20.213 IDIAZABAL [Gipuzkoa] ESPAÑA / SPAIN  
 P.O. Box, 23 - 20.200 BEASAIN - E-mail: jaso@jaso.com  
 Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20  
**www.jaso.com**

Fecha / Date: 08/02/2017

 **FEM 1005 - C25**

DELEGACION / *DEALER*