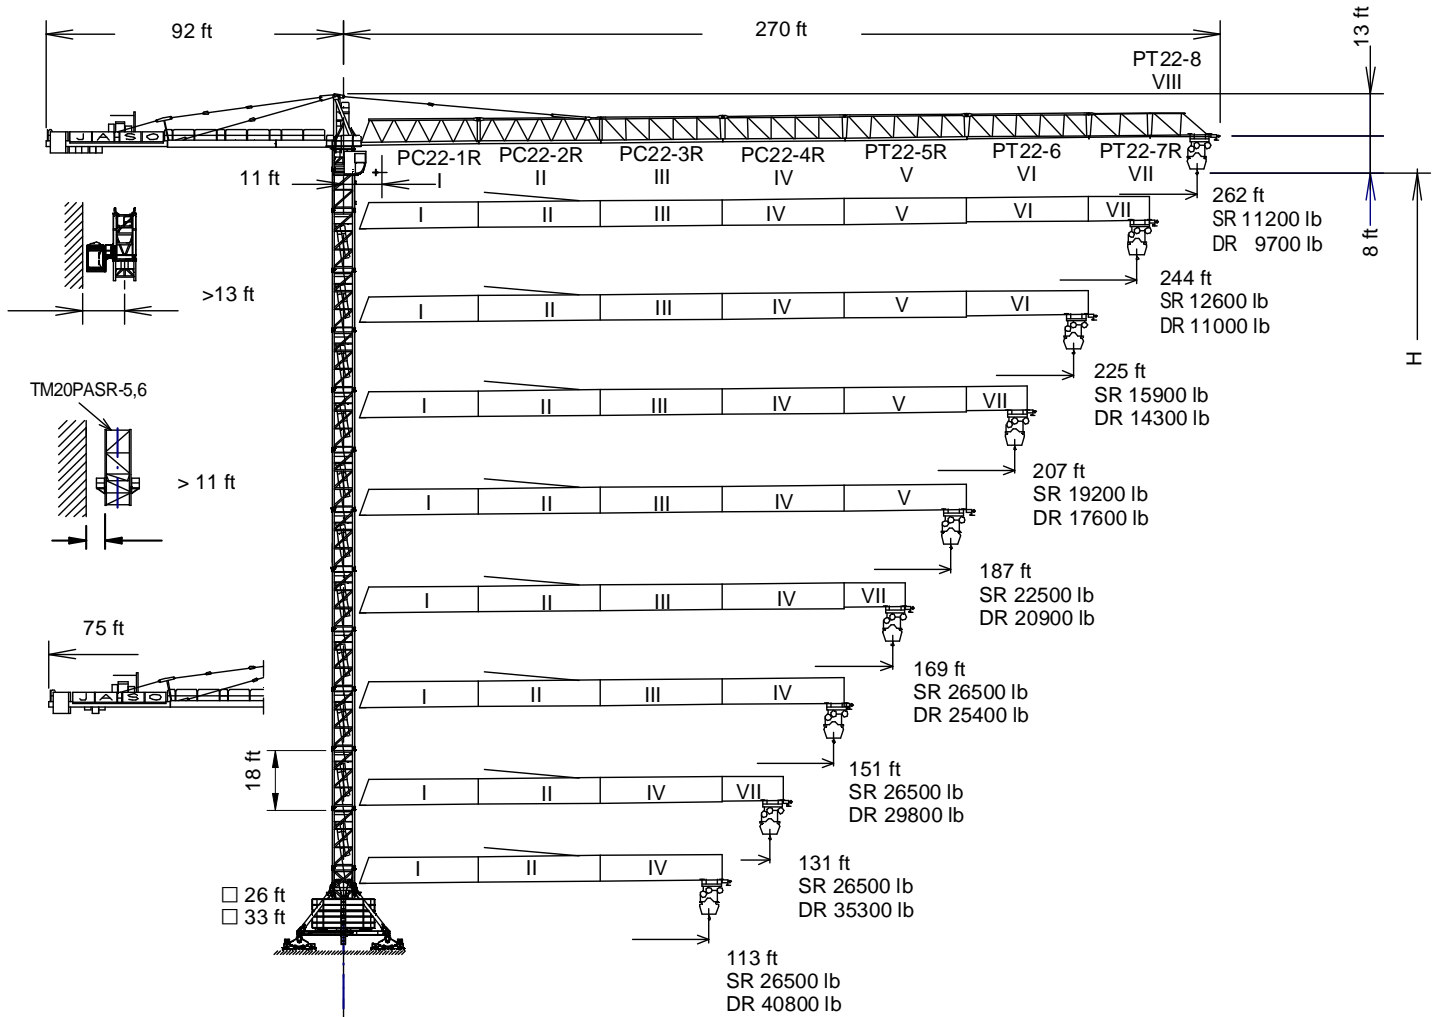




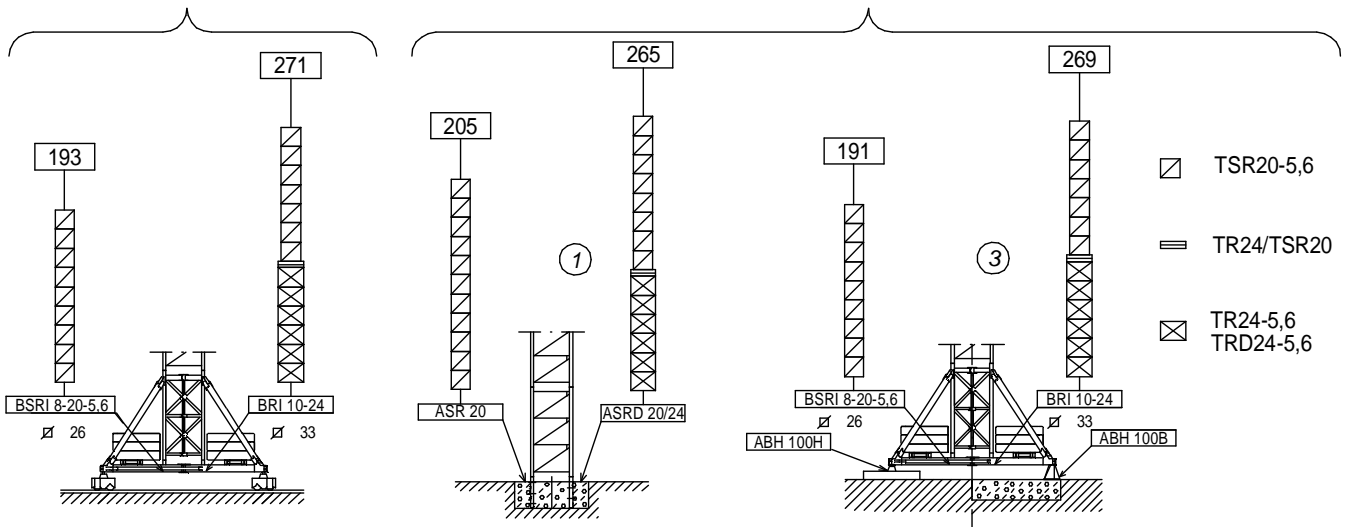
UNE 58-101
FEM 1001

UNE-EN-ISO 9001



(H) TRASLACIÓN / TRAVELLING

(H) ESTACIONARIA / STATIONARY



Fecha / Date: 08/02/2017



FEM 1001



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability /

CARGAS / LOADS

















J600.24.A

 ST-SR (lb)		Cargas máximas / Maximum loads Single Trolley – Single Reeving – 26500 lb										
 [ft]	26500 lb @ ... (ft)	Alcance del gancho [ft] / Hook reach [ft]										
		82	98	113	131	151	169	187	207	225	244	262
262	133	26500	26500	26500	26500	22800	19900	17500	15500	13800	12400	11200
244	134	26500	26500	26500	26500	23000	20100	17700	15700	14000	12600	—
225	148	26500	26500	26500	26500	25800	22600	20000	17600	15900	—	—
207	158	26500	26500	26500	26500	26500	24400	21600	19200	—	—	—
187	163	26500	26500	26500	26500	26500	25400	22500	—	—	—	—
169	169	26500	26500	26500	26500	26500	26500	—	—	—	—	—
151	151	26500	26500	26500	26500	26500	—	—	—	—	—	—
131	131	26500	26500	26500	26500	—	—	—	—	—	—	—
113	113	26500	26500	26500	—	—	—	—	—	—	—	—

 ST - DR [lb]		Cargas máximas / Maximum loads Single Trolley – Double Reeving – 52900 lb										
 [ft]	52900 lb @ ... (ft)	Alcance del gancho [ft] / Hook reach [ft]										
		82	98	113	131	151	169	187	207	225	244	262
262	68	43100	35000	29700	24900	20900	18100	15800	13800	12200	10800	9700
244	69	43700	35500	30100	25200	21200	18400	16100	14000	12500	11000	—
225	76	48800	39700	33800	28400	24000	20900	18300	16100	14300	—	—
207	82	52800	43100	36700	30900	26200	22800	20100	17600	—	—	—
187	85	52900	44700	38200	32200	27200	23800	20900	—	—	—	—
169	89	52900	47400	40500	34200	29000	25400	—	—	—	—	—
151	91	52900	48500	41500	35000	29800	—	—	—	—	—	—
131	92	52900	48900	41800	35300	—	—	—	—	—	—	—
113	92	52900	47700	40800	—	—	—	—	—	—	—	—

CARACTERISTICAS DE MECANISMOS / MECHANISMS

J600.24.A















*opcional *optional								
	EC88110VF 65 kW	*EC150185VF 110 kW	TG4025VFJ600 4 x 7,5 kW	OG4006VF 4 x 7,5 kW	TC15105VF 11 kW	TH4010 29,4 kW		
			0...82 ft/min	0...0,8 r/min s/min	26500 0...344 ft/min	1.9 ft/min		
			 480V 60Hz		52900 ft 0...171 ft/min			
	H ≤ SR DR		1430 ft	715 ft				



Fecha / Date: 08/02/2017


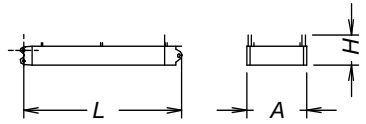


 **FEM 1001**

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability /

LISTA DE EMBARQUE / PACKING LIST			J600.24.A			
DENOMINACIÓN / DENOMINATION			L [ft]	A [ft]	H [ft]	P / W [lb]
Torre inferior <i>Lower tower</i>	TSRI 20-5,6		19.7	7.4	7.4	14500
Torre desmontada <i>Dismantled tower</i>	TRD24-5,6		19.7	3.8	8.3	11370
Torre <i>Tower</i>	TSR20 TSR20-5,6 TR24-5,6		14.0 19.7 19.7	7.4 7.4 9.1	7.4 7.4 9.3	6900 9400 10200
Larguero largo, reducción <i>Long crossbar, reduction</i>	TR24/TSR20		13.0	2.0	6.0	5000
Larguero corto reducción <i>Short crossbar, reduction</i>	TR24/TSR20		6.3	2.0	6.0	2300
Torre asiento pista + base punta de torre + orientación <i>Slewing table + tower head base + slewing mechanism</i>			15.4	8.1	8.4	27200
Punta de torre <i>Tower head</i>			14.3	7.3	6.6	9500
Conjunto asiento pista, punta de torre y orientación <i>Slewing table assembly, tower head and slewing mechanism</i>			26.7	8.2	8.4	36700
Tramo de pluma <i>Jib section</i>	PC22-1R (I)		38.2	7.3	8.2	11240
	PC22-2R (II)		38.5	7.1	8.1	12680
	PC22-3R (III)		38.5	6.8	8.1	13120
	PC22-4R (IV)		38.5	6.8	8.1	11350
	PT22-5R (V)		38.5	6.8	8.1	6500
	PT22-6 (VI)		38.5	6.8	8.1	4370
	PT22-7R (VII)		19.4	6.8	8.0	2430
	PT22-8 (VIII)		19.2	6.8	7.9	1500
Polipasto <i>Hook assembly</i>	ST/DR		6.8	2.3	4.5	2470
Carro <i>Trolley</i>	ST/DR		10.7	7.6	7.2	3010
Plataforma y cabina <i>Platform and cabin</i>			12.7	7.3	8.2	2560
Contrapluma con plataformas <i>Counterjib with platforms</i>			37.8	11.2	7.6	20170

LISTA DE EMBARQUE / PACKING LIST

J600.24.A

DENOMINACIÓN / DENOMINATION		L [m]	A [m]	H [m]	P / W [kg]
Prolongación larga de contrapluma con plataformas <i>Large counterjib extension with platforms</i>		34.0	6.6	2.9	8900
Prolongación contrapluma con plataforma / <i>Counterjib extension with platform</i>		18.0	6.6	3.1	5400
Soporte y elevación (sin cable) / <i>Support and hoisting (without rope)</i>		8.2	6.9	4.1	7330
Transporte torre de montaje <i>Jacking cage transport</i>	TM20PASR-5,6 	35.5	7.5	7.9	26800

LASTRES INFERIORES / LOWER BALLASTS

J600.24.A

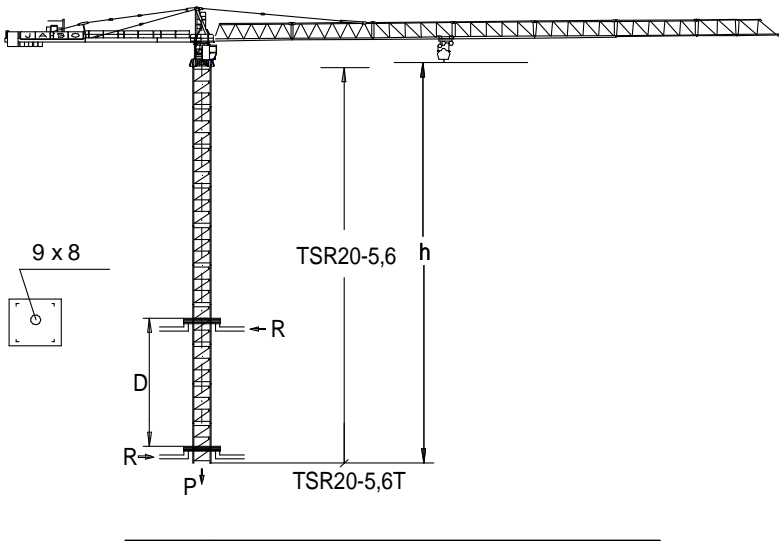
BRI 10-24	H (ft)	198	271
	P (lb)	105800	185200
BSRI 8-20-5,6	H (ft)	138	193
	P (lb)	185200	264600

H: Altura bajo gancho / *Height under hook*


Para alturas intermedias tomar el lastre correspondiente a la altura superior / *For intermediate heights take the ballast corresponding to the higher height*

TREPADO / CLIMBING


J600.24.A





$$h_{max}: \text{TSR20-5,6T} + 7 \times \text{TSR205,6}$$

	▶	■
169 ft		
h (ft)	147	
D (ft)	47,5 - 69	
P (lbf)	369800	315900
Rmax (lbf)	79800	106800

TSR20-5,6T: 204.31.700

	Trepado interno / <i>Internal climbing.</i>
---	---

 Viento fuera de servicio / *Out of service wind*

 Consultar / *Consult*

▶ En servicio / *In service*

■ Fuera de servicio / *Out of service*



Ctra./Rd. Madrid - Irún Km. 415 - 20.213 IDIAZABAL [Gipuzkoa] ESPAÑA / SPAIN
P.O. Box, 23 - 20.200 BEASAIN - E-mail: jaso@jaso.com
Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20
www.jaso.com

Fecha / *Date*: 08/02/2017

 **FEM 1001**

DELEGACION / *DEALER*