




EN 14439
C25

J480PA

GRUA TORRE / TOWER CRANE

FEM 1005 - C25

UNE-EN-ISO 9001

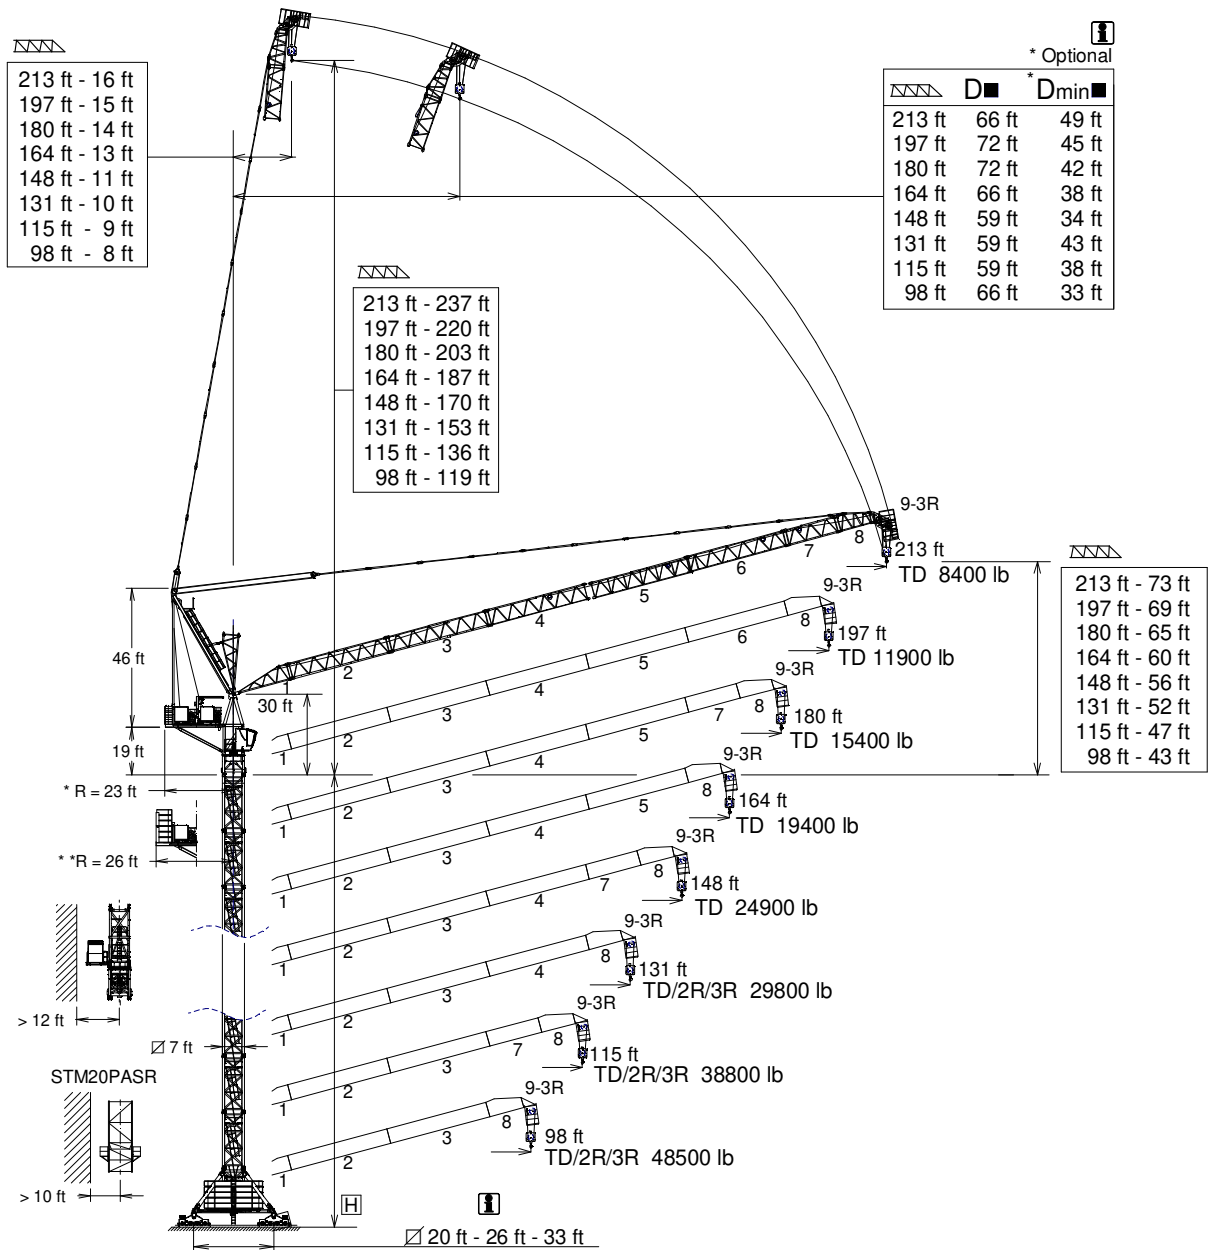

* Contrapesos metálicos / Steel Counterweight ** Contrapesos de hormigón / Concrete counterweights

D ■ Distancias fuera de servicio dependen de la altura de la torre / Out of service distances depend on tower height

*Dmin ■ Distancias mínimas fuera de servicio dependen de la altura de la torre / Out of service minimum distances depend on tower height

Tramo pluma 1 / Jib section 1	206.40.000	Tramo pluma 5 / Jib section 5	206.44.000	Tramo pluma 9-3R / Jib section 9-3R ...	206.48.000
Tramo pluma 2 / Jib section 2	206.41.200	Tramo pluma 6 / Jib section 6	206.45.000	TSR20	206.31.200
Tramo pluma 3 / Jib section 3	206.42.200	Tramo pluma 7 / Jib section 7	206.46.000	TSR20-5,6	206.31.000
Tramo pluma 4 / Jib section 4	206.43.000	Tramo pluma 8 / Jib section 8	206.47.200	TR24/TSR20	204.36.500

CUSTOMIZE YOUR CRANE

OPTIMUS
line JASD



OPTI Cubo



TC Diagnosis
SYSTEM



CLIMBING
Solution



SAFETY
Pack



Customization



ECO Mode



COMFORT
Cabin



HIGH POWER
Motors



JL25 Tower
Crane Elevator



SMARTLINK
BE SMART
keep control



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

30/05/2025

CARGAS / LOADS

J480PA




TD - 26500 lb



	TD 26500 lb @ ...(ft)	98	115	131	148	164	180	197	213
213	135	26500	26500	26500	22300	17600	14100	11000	8400
197	137	26500	26500	26500	23100	18700	15000	11900	—
180	138	26500	26500	26500	23600	19000	15400	—	—
164	139	26500	26500	26500	23800	19400	—	—	—
148	143	26500	26500	26500	24900	—	—	—	—
131	131	26500	26500	26500	—	—	—	—	—
115	115	26500	26500	—	—	—	—	—	—
98	98	26500	—	—	—	—	—	—	—

CARGAS / LOADS

J480PA



TD/2R/3R

26500 / 52900 / 79400 lb



	3R 79400 lb @ (ft)	2R 52900 lb @ (ft)	TD 26500 lb @ (ft)	49	66	82	98	115	131	148	164	180	197	213
213	79400 lb @ (ft)	132	132	26500	26500	26500	26500	26500	26500	21200	16800	13000	9900	7300
197		87	135	52900	52900	52900	43900	34400	27300	21800	17400	13900	10800	—
180		87	135	52900	52900	52900	44100	34600	27800	22300	17900	14300	—	—
164	63	87	136	79400	75800	56700	44100	34800	28000	22500	18300	—	—	—
148	64	88	139	79400	77400	58200	45200	36200	29100	23800	—	—	—	—
131	65	89	131	79400	77800	58600	45900	36600	29800	—	—	—	—	—
115	66	92	115	79400	79400	60800	48100	38800	—	—	—	—	—	—
98	67	92	98	79400	79400	61500	48500	—	—	—	—	—	—	—

	2R 39700 lb @ (ft)	TD 19800 lb @ (ft)	82	98	115	131	148	164	180	197	213
213	104	152	39700	39700	33700	26500	21200	16800	13000	9900	7300

	3R 66100 lb @ (ft)	2R 44100 lb @ (ft)	TD 22000 lb @ (ft)	66	82	98	115	131	148	164	180
180	73	99	149	66100	57100	44100	34600	27800	22300	17900	14300

Datos válidos para / Valid data for



3R H ≤ 361 ft







2R
TD H ≤ 394 ft

FEM 1005 - C25



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability



EC88115VF
65 kW

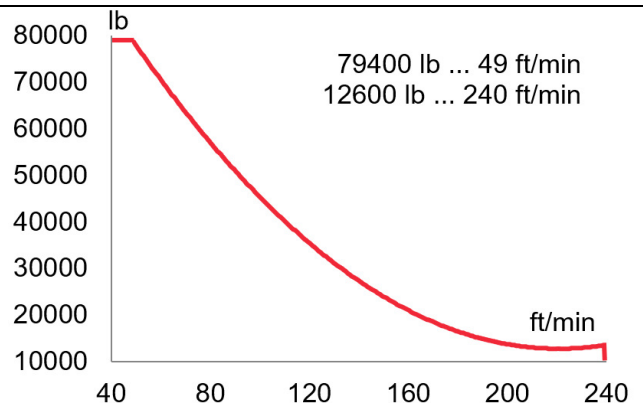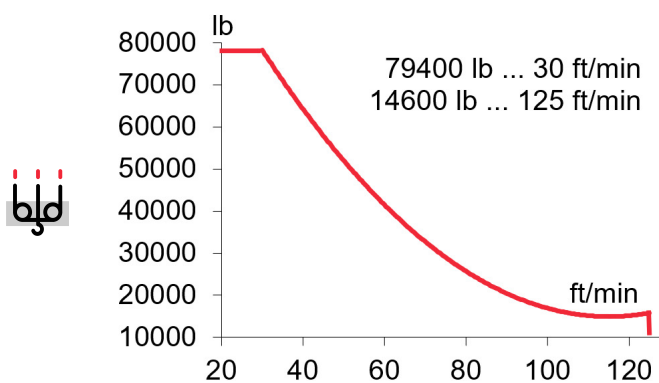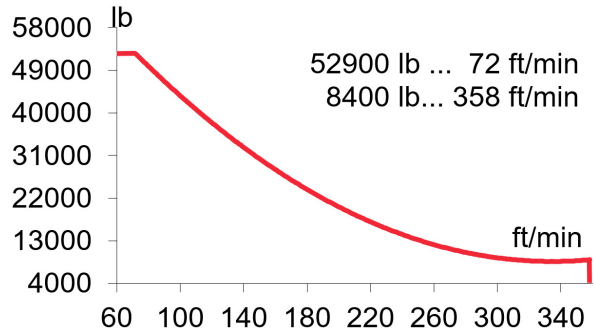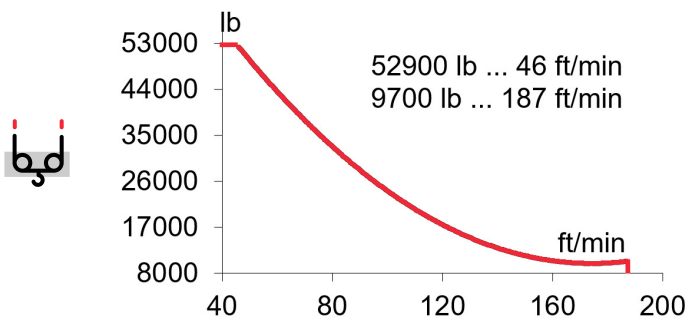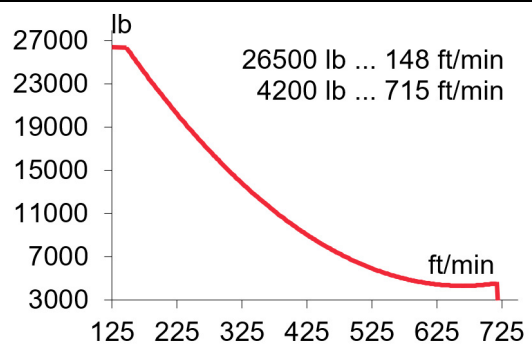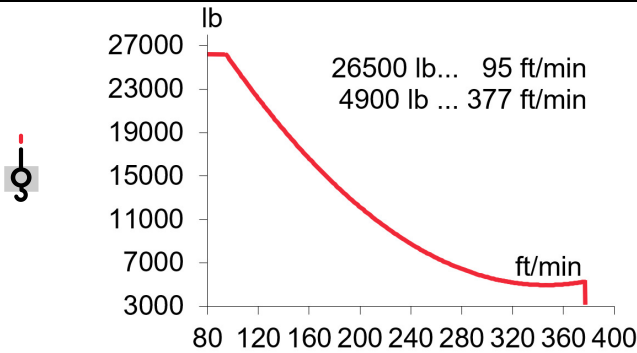
***EC150218VF**
110 kW


TD 2867 ft
H ≤ 2R 1434 ft
3R 955 ft



3704 ft


OG2008VF
2 x 7,3 kW

EP10015VF
75 kW

TG4025VF
4 x 7,5 kW

TH4010
29,4 kW

0...0,8
r/min
sl/min

1,5
min

0...82
ft/min

2 ft/min

⚡ 3~ 400V 50Hz
480V 60Hz


KVA			
EC88115VF	81	113	145
EC150218VF	103	146	189



FEM 1005 - C25


*Dmin

R = 23 ft




(H) ESTACIONARIA 1 / STATIONARY 1

TD

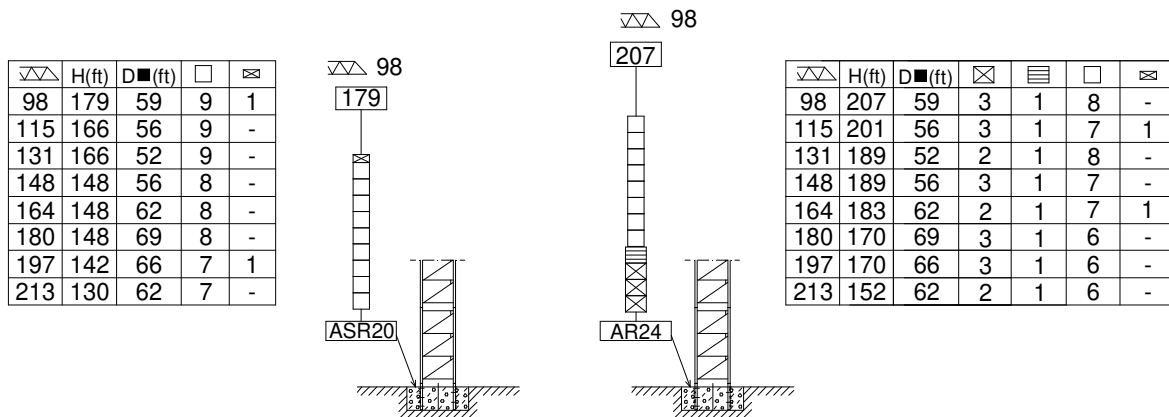

TD / 2R / 3R

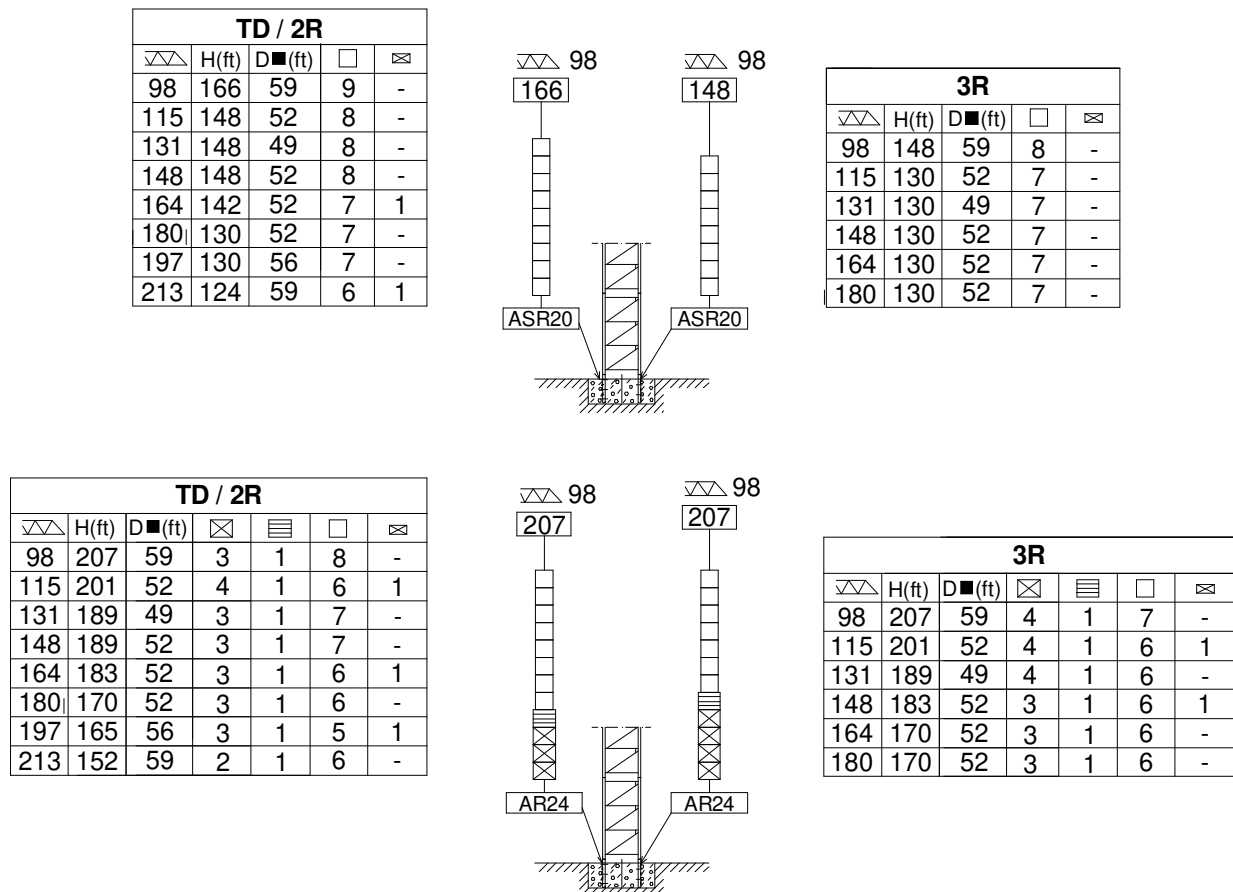

⊠ TSR20

□ TSR20-5,6

≡ TR24/TSR20

⊠ TR24-5,6

ASR20 160.21.200

ASRD 20/24 156.21.000

AR24 156.21.200

H= Máxima altura de torre sin arriostrar (ft) / Maximum tower height without fastening (ft)




FEM 1005 - C25



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability


*Dmin

R = 23 ft




(H) ESTACIONARIA 3 / STATIONARY 3

TD

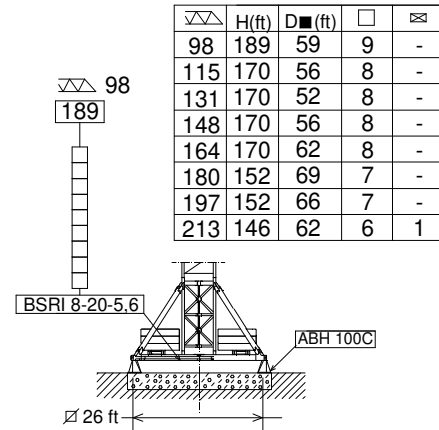


TD / 2R / 3R

TD / 2R				
▽	H(ft)	D■(ft)	□	⊠
98	189	59	9	-
115	170	52	8	-
131	170	49	8	-
148	170	52	8	-
164	152	52	7	-
180	152	52	7	-
197	152	56	7	-
213	146	59	6	1

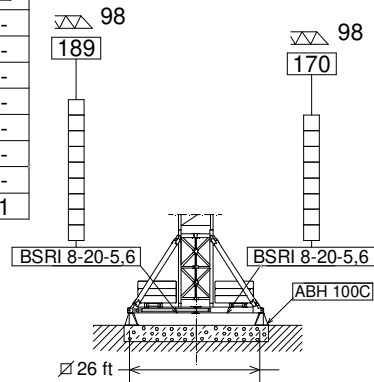


(H) TRASLACION / TRAVELLING

TD

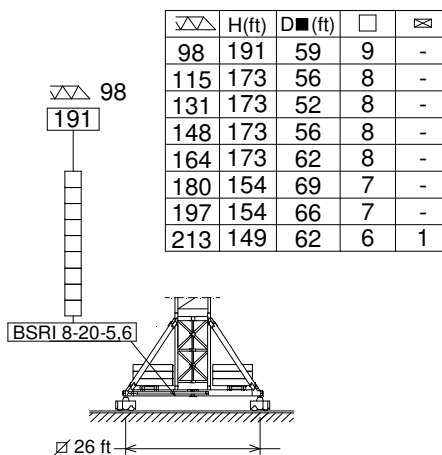

TD / 2R / 3R

TD / 2R				
▽	H(ft)	D■(ft)	□	⊠
98	191	59	9	-
115	173	52	8	-
131	173	49	8	-
148	173	52	7	-
164	154	52	7	-
180	154	52	7	-
197	154	56	7	-
213	149	59	6	1

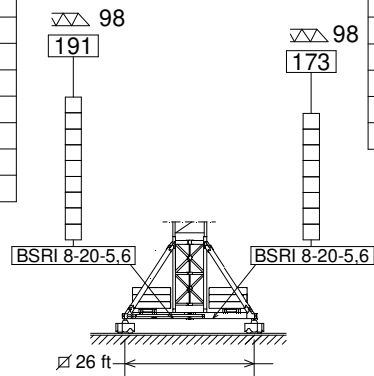

⊠ TSR20

□ TSR20-5,6

BSRI 8-20-5,6204.20.000

ABH 100C170.23.000

H= Máxima altura de torre sin arriostrar (ft) / Maximum tower height without fastening (ft)





FEM 1005 - C25




Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

 *Dmin

R = 23 ft

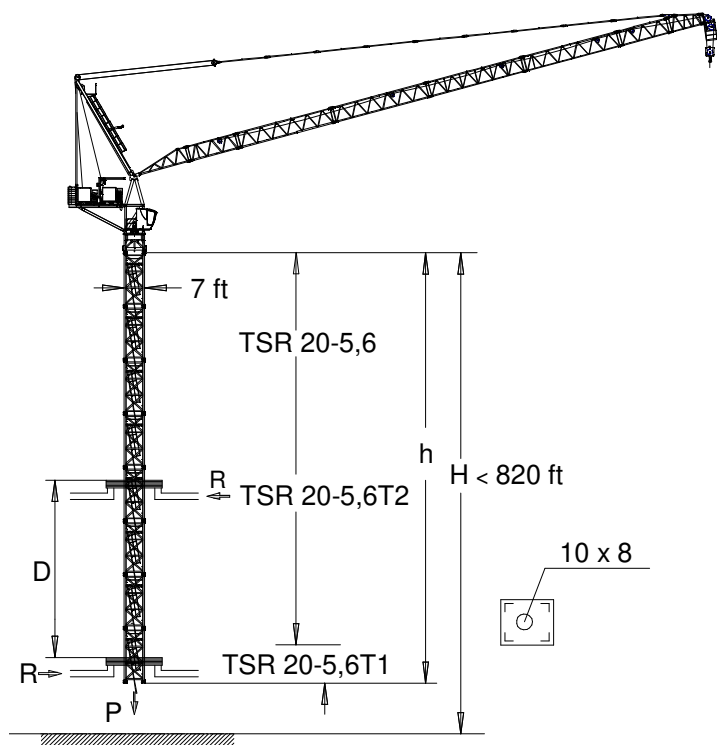

h_{max} :
TSR20-5,6T1 + 5 x TSR20-5,6 + TSR20-5,6T2 + TSR20

	TD 26500 lb		■ (D■)
h (ft)	129		
D (ft)	59 - 49		
P (lbf)	394540	394540	
Rmax (lbf)	97790	187720	

h_{max} :
TSR20-5,6T1 + 5 x TSR20-5,6 + TSR20-5,6T2

	TD/2R/3R TD/2R 52900 lb		■ (D■)
h (ft)	129		
D (ft)	59 - 51		
P (lbf)	419270	419270	
Rmax (lbf)	101160	184340	


h_{max} :
TSR20-5,6T1 + 5 x TSR20-5,6 + TSR20-5,6T2

	TD/2R/3R 3R 79400 lb		■ (D■)
h (ft)	129		
D (ft)	59 - 50		
P (lbf)	440630	359690	
Rmax (lbf)	102290	185470	

TSR20-5,6T1: 206.31.400
TSR20-5,6T2: 206.31.500

 Trepado interno / Internal climbing

R = 23 ft



H = 7 x TSR20-5,6 + ASRD20/24 + 

8 x



7 x



1 x


OPEN TOP 40'



FEM 1005 - C25

 *Dmin■

R = 26 ft




(H) ESTACIONARIA 1 / STATIONARY 1

TD

▽▽ 98

179




▽▽	H(ft)	D■(ft)	□	⊠
98	179	62	9	1
115	166	59	9	-
131	166	59	9	-
148	148	59	8	-
164	148	66	8	-
180	148	72	8	-
197	142	72	7	1
213	130	66	7	-

▽▽	H(ft)	D■(ft)	⊠	≡	□	⊠
98	207	62	3	1	8	-
115	189	59	2	1	8	-
131	189	59	3	1	7	-
148	183	59	2	1	7	1
164	170	66	2	1	7	-
180	170	72	3	1	6	-
197	165	72	3	1	5	1
213	152	66	2	1	6	-

▽▽ 98

207



TD / 2R / 3R

TD / 2R


▽▽	H(ft)	D■(ft)	□	⊠
98	161	66	8	1
115	148	59	8	-
131	148	56	8	-
148	148	56	8	-
164	148	56	7	1
180	142	56	7	-
197	130	56	6	1
213	124	59	6	1

▽▽ 98

161

▽▽ 98

148



3R

▽▽	H(ft)	D■(ft)	□	⊠
98	148	66	8	-
115	130	59	7	-
131	130	56	7	-
148	130	56	7	-
164	130	56	7	-
180	130	56	7	-

TD / 2R


▽▽	H(ft)	D■(ft)	⊠	≡	□	⊠
98	207	66	3	1	8	-
115	201	59	4	1	6	1
131	189	56	3	1	7	-
148	183	56	3	1	6	1
164	170	56	2	1	7	-
180	170	56	3	1	6	-
197	165	56	3	1	5	1
213	152	59	2	1	6	1

▽▽ 98

207

▽▽ 98

207



3R

▽▽	H(ft)	D■(ft)	⊠	≡	□	⊠
98	207	66	4	1	7	-
115	201	59	5	1	5	1
131	189	56	3	1	6	-
148	183	56	3	1	6	1
164	170	56	3	1	6	-
180	170	56	3	1	6	-

⊠ TSR20

□ TSR20-5,6

≡ TR24/TSR20

⊠ TR24-5,6

ASR20 160.21.200

ASRD 20/24.....156.21.000

AR24156.21.200

H= Máxima altura de torre sin arriostrar (ft) / Maximum tower height without fastening (ft)




FEM 1005 - C25



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

 *Dmin


R = 26 ft




(H) ESTACIONARIA 3 / STATIONARY 3

TD

TD / 2R / 3R

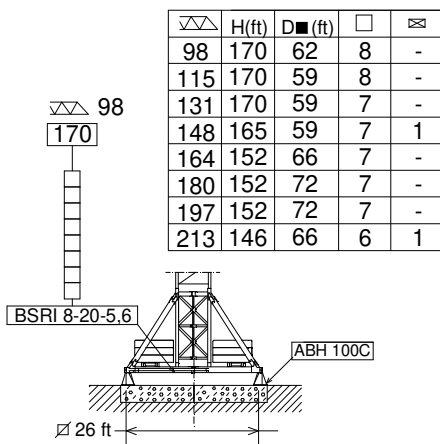


TD / 2R					
▽	H(ft)	D■(ft)	□	⊠	
98	170	66	8	-	
115	170	59	8	-	
131	170	56	8	-	
148	170	56	8	-	
164	152	56	7	-	
180	152	56	7	-	
197	146	56	6	1	
213	146	59	6	1	

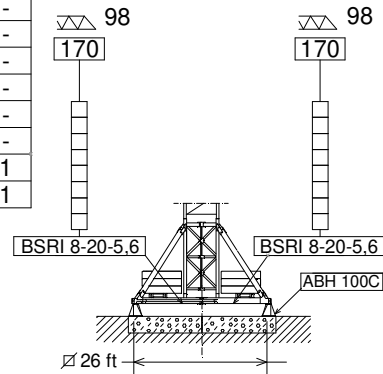


(H) TRASLACION / TRAVELLING

TD

TD / 2R / 3R

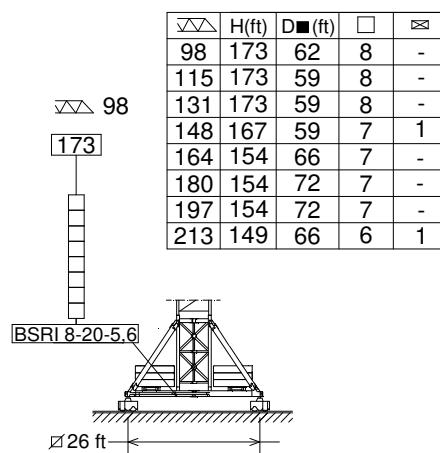

TD / 2R					
▽	H(ft)	D■(ft)	□	⊠	
98	173	66	8	-	
115	173	59	8	-	
131	173	56	8	-	
148	173	56	8	-	
164	154	56	7	-	
180	154	56	7	-	
197	149	56	6	1	
213	149	59	6	1	

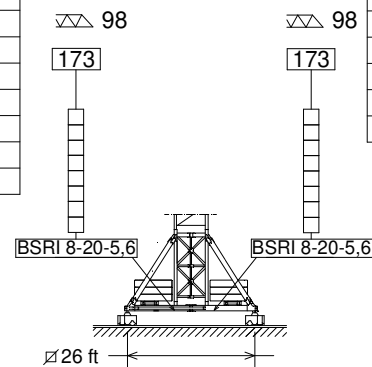

⊠ TSR20

□ TSR20-5,6

BSRI 8-20-5,6..... 204.20.000

ABH 100C..... 170.23.000

H= Máxima altura de torre sin arriostrar (ft) / Maximum tower height without fastening (ft)





FEM 1005 - C25



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

 *Dmin■

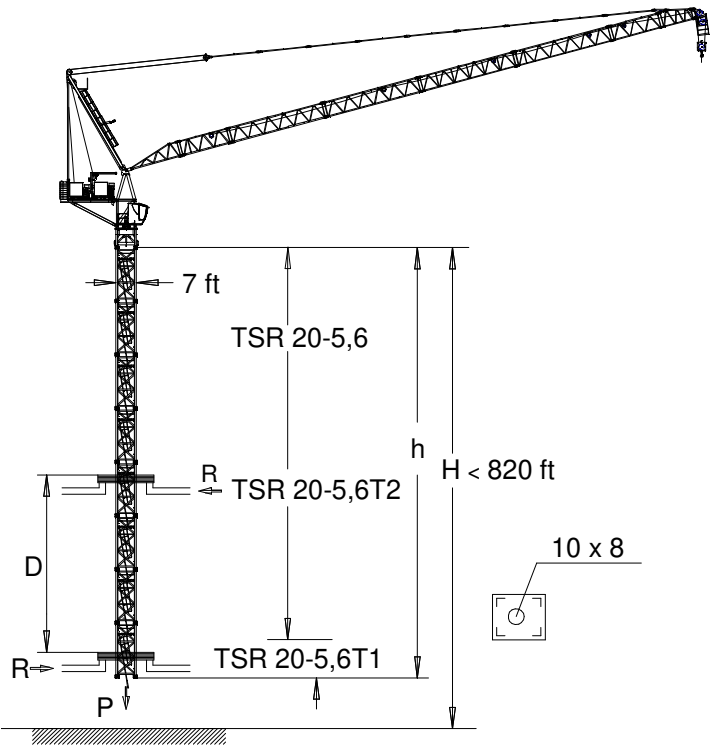

h_{max} :
TSR20-5,6T1 + 5 x TSR20-5,6 + TSR 20-5,6T2

 213 ft →	TD 26500 lb	►	■ (D■)
h (ft)	129		
D (ft)	59 - 50		
P (lbf)	388920	361940	
Rmax (lbf)	97790	187720	

h_{max} :
TSR20-5,6T1 + 4 x TSR20-5,6 + TSR20-5,6T2 + TSR20

 197 ft →	TD/2R/3R TD/2R 52900 lb	►	■ (D■)
h (ft)	123		
D (ft)	56 - 50		
P (lbf)	412520	358570	
Rmax (lbf)	103410	185470	

h_{max} :
TSR20-5,6T1 + 5 x TSR20-5,6 + TSR20-5,6T2

 164 ft →	TD/2R/3R 3R 79400 lb	►	■ (D■)
h (ft)	129		
D (ft)	59 - 51		
P (lbf)	420390	339460	
Rmax (lbf)	101160	184340	

TSR20-5,6T1: 206.31.400
TSR20-5,6T2: 206.31.500

 Trepado interno / Internal climbing



$H = 7 \times \text{TSR20-5,6} + \text{ASRD20/24} + \text{[Truck Icon]}$

8 x



9 x












1 x

OPEN TOP 40'

 FEM 1005 - C25



LISTA DE EMBARQUE / PACKING LIST
J480PA







			L (ft)	A (ft)	H (ft)	P/W (lb)
Torre inferior / Lower tower	TSRI-20-5,6		19.7	7.4	7.4	6562
Torre / Tower	TSR20		14.0	7.4	7.4	6860
	TSR20-5,6		19.7	7.4	7.4	9280
Torre asiento pista + Torre superior + Orientación Slewing table + Top tower + Slewing mechanism			31.7	7.6	8.4	34890
Punta de torre / Tower head			19.2	7.5	7.8	11680
Torre asiento pista + Base punta de torre + Orientación Slewing table + Tower head base + Slewing mechanism			15.3	8.4	8.1	23200
Tramo de pluma Jib section	1		20.6	7.2	5.8	4030
	2		34.3	5.1	5.7	5970
	3		34.5	5.1	5.7	5800
	4		34.6	5.1	5.7	5060
	5		34.6	4.9	5.7	4170
	6		34.6	5.1	5.7	3850
	7		18.4	5.1	5.7	2160
	8		12.4	5.1	6.1	2190
	9-3R		7.8	6.5	10.4	2440
Contrapluma + Mecanismos + Pasteca + Plumin Counterjib + Mechanisms + Reeving block + Auxiliary jib			24.0	7.4	8.2	43210
Contrapluma + Elevacion pluma + Pasteca + Plumin Counterjib + Luffing mechanisms + Reeving block + Auxiliary jib			24.0	7.3	8.2	28000
Mecanismo elevacion carga / Hoisting mechanism			7.2	8.3	6.8	15210
Polipasto / Hook assembly	TD/2R/3R		3.6	1.1	5.6	1760
	TD		0.5	0.9	5.6	530


FEM 1005 - C25


Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

30/05/2025

LISTA DE EMBARQUE / PACKING LIST
J480PA

		L (ft)	A (ft)	H (ft)	P/W (lb)
Tirante sostén pluma / Jib support tie		19.2	1.4	2.0	5240
Parte superior / Top part		39.2	7.3	2.9	15370
Plataforma + Cabina / Platform + Cabin		12.0	7.5	8.1	2760
Transporte torre de montaje / Jacking cage transport	TM20PASR-5,6 	35.5	7.5	7.9	26760
Contrapeso / Counterweight		7.2	1.1	2.7	6610
		14.8	1.1	2.7	13230
Contrapeso / Counterweight Lastre / Ballast		12.5	0.9	4.9	6610
		12.5	1.9	4.9	13230

 Viento fuera de servicio / Out of service wind

 Consultar / Consult

 En servicio / In service

 Fuera de servicio / Out of service

 Opcional / Optional


Ctra./ Rd. Madrid – Irún - Km. 415 - 20213 IDIAZABAL (Gipuzkoa) - ESPAÑA / SPAIN
P.O. Box, 23 - 20.200 - BEASAIN - E-mail: jaso@jaso.com
Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20
www.jaso.com

30/05/2025

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability


FEM 1005 - C25

DELEGACIÓN / DEALER