




EN 14439
C25

J638PA

GRUA TORRE / TOWER CRANE

FEM 1005 - C25

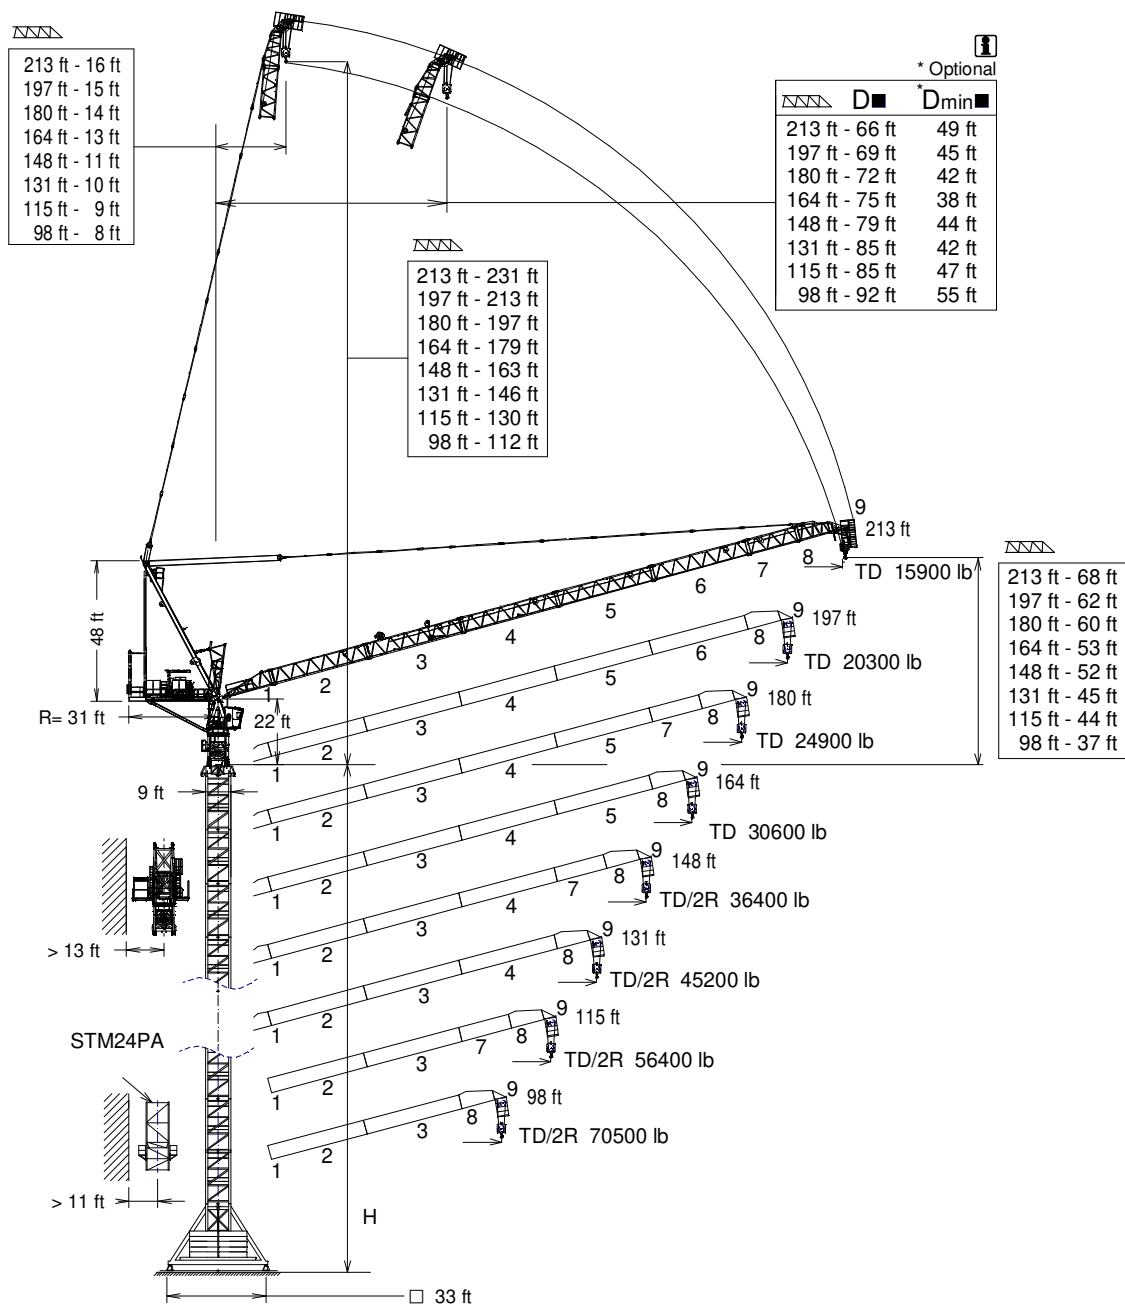UNE-EN-ISO 9001



H= Máxima altura de torre sin arriostrar (m). / Maximum tower height without fastening (m)

D ■ Distancias fuera de servicio dependen de la altura de la torre / Out of service distances depend on tower height

*Dmin ■ Distancias mínimas fuera de servicio dependen de la altura de la torre / Out of service minimum distances depend on tower height

Tramo pluma 1 / Jib section 1	216.40.000
Tramo pluma 2 / Jib section 2	216.41.000
Tramo pluma 3 / Jib section 3	216.42.000
Tramo pluma 4 / Jib section 4	216.43.000
Tramo pluma 5 / Jib section 5	216.44.000

Tramo pluma 6 / Jib section 6	216.45.000
Tramo pluma 7 / Jib section 7	216.46.000
Tramo pluma 8 / Jib section 8	206.47.200
Tramo pluma 9 / Jib section 9	212.48.000

TR24-5,6	206.32.000
TRD24-5,6	206.32.300
TRID24-5,6	156.30.800
TR24/TSR20	204.36.500

CUSTOMIZE YOUR CRANE

OPTIMUS
line JASD



OPTI Cube



TC Diagnosis
SYSTEM



CLIMBING
Solution



SAFETY
Pack



Customization



ECO Mode



COMFORT
Cabin



HIGH POWER
Motors



JL25 Tower
Crane Elevator



BE SMART
keep control



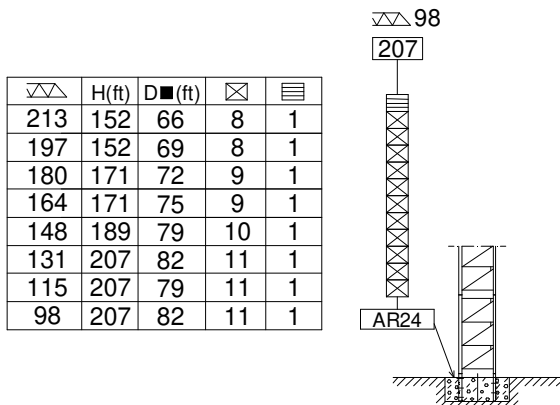
Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

20/10/2025


 *Dmin ■

(H) ESTACIONARIA / STATIONARY

TD




TD / 2R

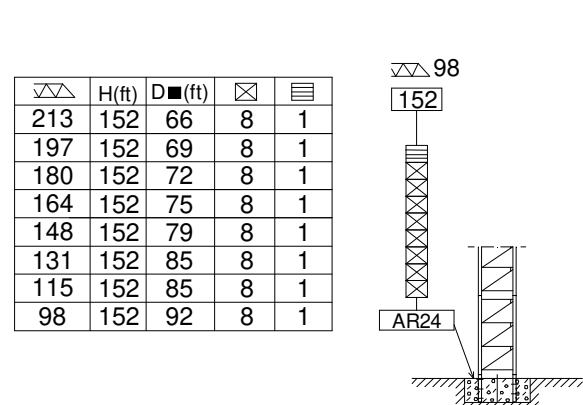


(H) ESTACIONARIA 3 / STATIONARY 3

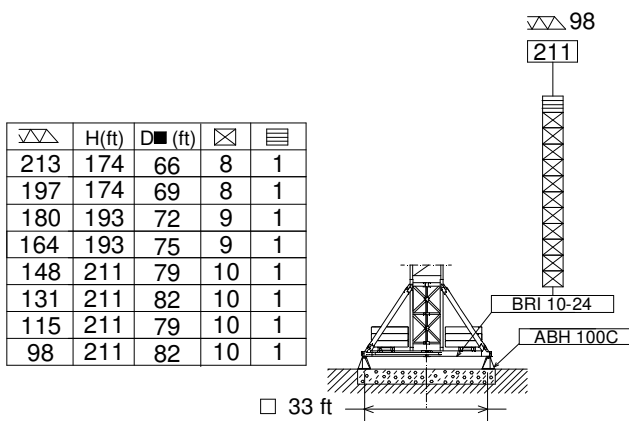TD




TD / 2R

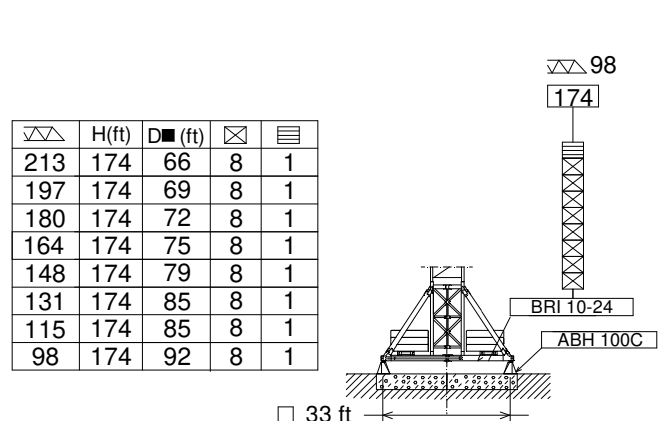


(H) TRASLACION / TRAVELLING

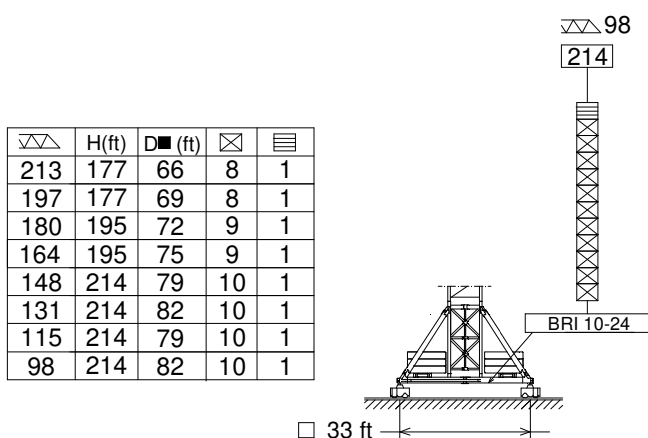TD



TD / 2R

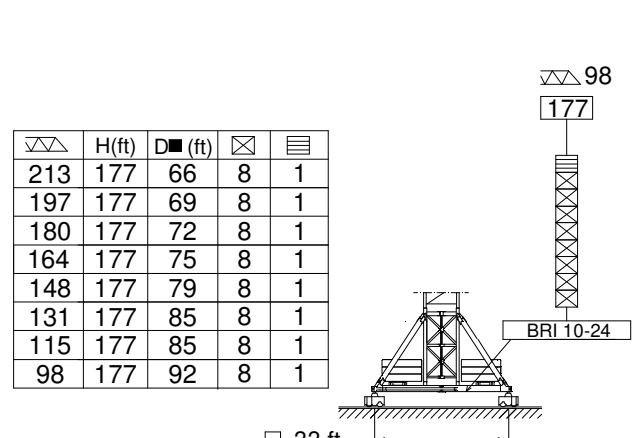

≡ TR24/TSR20

☒ TR24-5,6

ASRD 20/24 156.21.000
AR24 156.21.200

BRI 10-24 156.20.500
ABH 100C 170.23.000

H= Máxima altura de torre sin arriostar (ft) / Maximum tower height without fastening (ft)



FEM 1005 - C25



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

CARGAS / LOADS

J638PA



TD - 35300 lb



	TD 35300 lb @ (ft)	82	98	115	131	148	164	180	197	213
213	143	35300	35300	35300	35300	33300	27800	23100	19200	15900
197	146	35300	35300	35300	35300	34400	28900	24300	20300	—
180	148	35300	35300	35300	35300	35300	29500	24900	—	—
164	151	35300	35300	35300	35300	35300	30600	—	—	—
148	148	35300	35300	35300	35300	35300	—	—	—	—
131	131	35300	35300	35300	35300	—	—	—	—	—
115	115	35300	35300	35300	—	—	—	—	—	—
98	98	35300	35300	—	—	—	—	—	—	—

CARGAS / LOADS

J638PA



TD/2R - 35300 / 70500 (lb)



	2R 70500 lb @ (ft)	TD 35300 lb @ (ft)	66	82	98	115	131	148	164	180	197	213
213		138	35300	35300	35300	35300	35300	31500	26000	21400	17600	14300
197		141	35300	35300	35300	35300	35300	32800	27300	22700	18700	—
180	88	143	70500	70500	61100	49400	40600	33700	28000	23400	—	—
164	90	146	70500	70500	62400	50700	41700	34800	29100	—	—	—
148	92	148	70500	70500	64400	52500	43400	36400	—	—	—	—
131	94	131	70500	70500	66600	54500	45200	—	—	—	—	—
115	96	115	70500	70500	68800	56400	—	—	—	—	—	—
98	98	98	70500	70500	70500	—	—	—	—	—	—	—

	2R 39700 lb @ (ft)	TD 19800 lb @ (ft)									
			82	98	115	131	148	164	180	197	213
213	128	190	39700	39700	39700	39500	31500	26000	21400	17600	14300

	2R 57300 lb @ (ft)	TD 28700 lb @ (ft)									
			66	82	98	115	131	148	164	180	197
197	102	159	57300	57300	57300	48500	39700	32800	27300	22700	18700

Datos válidos para / Valid data for:


 2R H ≤ 361 ft
 TD H ≤ 722 ft


FEM 1005 - C25


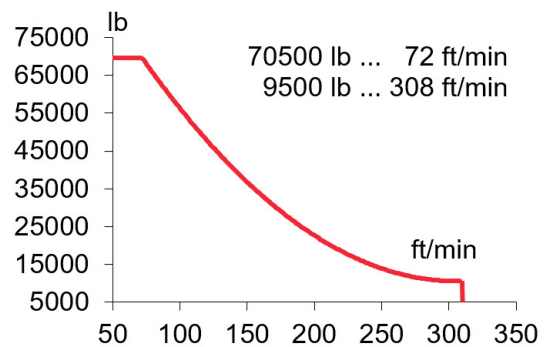
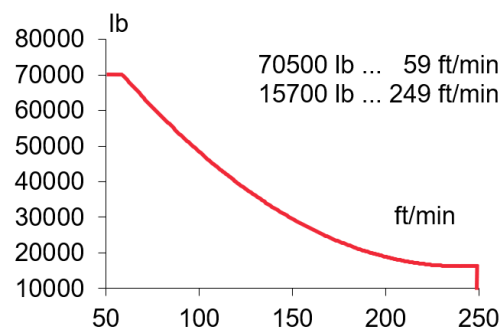
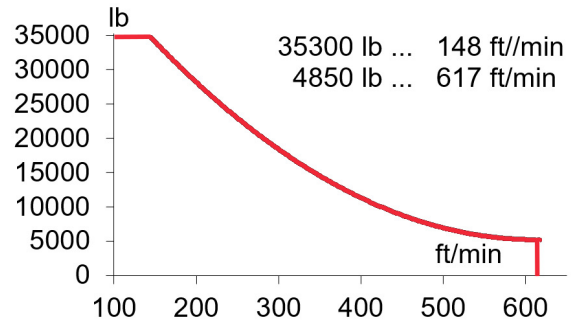
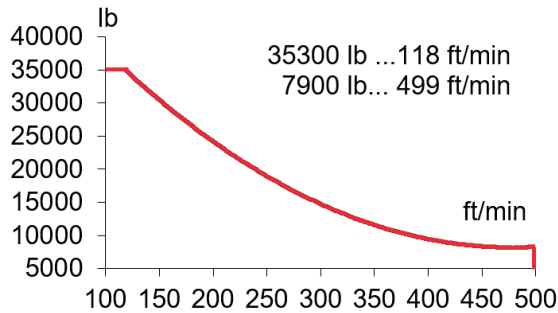


Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability



EC150152VF
110 kW


*** EC180188VF**
132 kW



$$H \leq \frac{TD}{2R} \quad \begin{matrix} 2133 \text{ ft} \\ 1066 \text{ ft} \end{matrix}$$



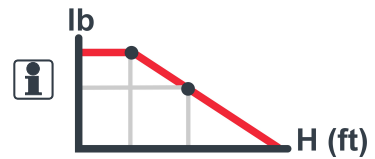2753 ft



OG2008VF
2 X 7,3 kW



EP10015VF
75 kW



TG4025VF
4 x 7,5 kW

0...0,8
r/min
sl/min

1,5
min

0...82
ft/min












400V 50Hz
480V 60Hz

KVA			
EC150152VF	103	146	189
EC180188VF	114	162	210










FEM 1005 - C25

			L (ft)	A (ft)	H (ft)	P/W(lb)
Torre inferior / Lower tower	TRID24-5,6		19.7	7.0	7.1	18190
Torre desmontada / Dismantled tower	TRD24-5,6		19.7	8.3	3.9	10850
Torre / Tower	TR24-5,6		19.7	8.9	9.2	9900
Larguero largo, reducción Long crossbar, reduction	TR24/TSR20		15.9	2.1	5.5	6280
Larguero corto reduccion Short crossbar, reduction	TR24/TSR20		7.8	1.9	5.5	3190
Torre asiento pista + Torre superior + Orientación Slewing table + Top tower + Slewing mechanism			24.7	7.8	8.3	41450
Punta de torre / Tower head			11.0	7.3	6.8	12790
Torre asiento pista + Base punta de torre + Orientación Slewing table + Tower head base + Slewing mechanism			17.1	8.3	7.8	28660
Tramo de pluma Jib section	1		20.3	7.1	5.8	4030
	2		34.3	5.0	5.7	5560
	3		34.5	5.0	5.7	5270
	4		34.6	5.0	5.7	4760
	5		34.6	4.9	5.7	4320
	6		34.6	4.9	5.7	3860
	7		18.4	4.9	5.7	2270
	8		12.2	4.9	6.1	2250
	9		6.6	6.2	6.7	2230
Contrapluma + Mecanismos + Pasteca + Plumin (sin cable de elevación) / Counterjib + Mechanisms + Reeving block + Auxiliary jib (without hoisting rope)			29.9	7.8	9.1	56220



LISTA DE EMBARQUE / PACKING LIST
J638PA

		L (ft)	A (ft)	H (ft)	P/W(lb)
Contrapluma + Elevacion pluma + Pasteca + Plumín Counterjib + Luffing mechanisms + Reeving block + Auxiliary jib		29.9	7.2	8.4	37700
Mecanismo elevacion carga sin cable / Hoisting mechanism without rope		8.0	8.1	7.1	18520
Polipasto / Hook assembly	TD/2R TD 	3.3 0.6	1.4 1.1	6.5 6.9	1730 840
Tirante sostén pluma / Jib support tie		17.7	1.4	2.0	4740
Parte superior / Top part		39.2	7.2	6.8	28880
Plataforma + Cabina / Platform + Cabin		12.0	6.3	8.1	2760
Contrapeso / Counterweight Lastre / Ballast		12.5	1.9	4.9	13230

TRANSPORTE / TRANSPORT
J638PA

 213 ft → H	H = 8 x TRD24-5,6 + TR24/TSR20 + ASRD 20/24 + 	10 x 	10 x 
--	---	---	--

	Viento fuera de servicio / Out of service wind
	Consultar / Consult
	En servicio / In service
	Fuera de servicio / Out of service
	Opcional / Optional



Ctra./ Rd. Madrid – Irún - Km. 415 - 20213 IDIAZABAL (Gipuzkoa) - ESPAÑA / SPAIN
 P.O. Box, 23 - 20.200 - BEASAIN - E-mail: jaso@jaso.com
 Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20
www.jaso.com

20/10/2025

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability


FEM 1005 – C25
 DELEGACIÓN / DEALER