

\*OPTIONAL EXTRA LIFT

H= Altura máxima bajo gancho sin arriostrar (ft) / Maximum height under hook without fastening (ft).

PC22-11 .....	169.40.000	PC22-15 .....	169.44.000	PT22-19 .....	169.48.000	TSP20 .....	214.31.300
PC22-12 .....	169.41.000	PT22-16 .....	169.45.000	PPT22 .....	169.48.200	TSP20-5,6 .....	214.31.100
PC22-13 .....	169.42.000	PT22-17 .....	169.46.000	PPC22 .....	169.48.400	TSP24-5,6 .....	214.32.200
PC22-14 .....	169.43.000	PT22-18 .....	169.47.000			TSP24/TSP20 .....	212.36.000

CUSTOMIZE YOUR CRANE

OPTIMUS  
line JASD

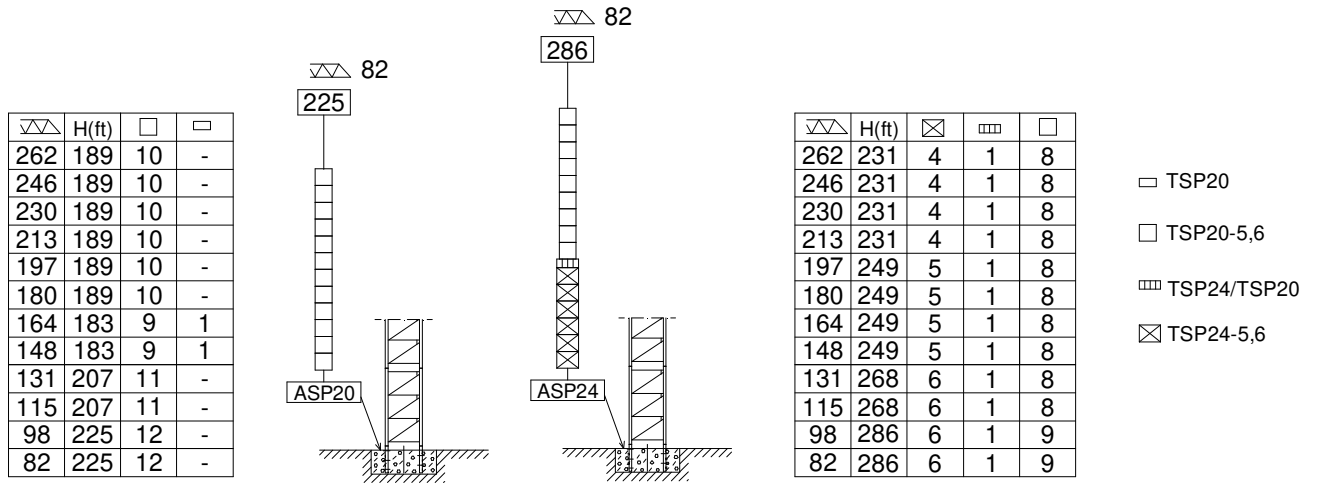
EXTRA Lift	OPTI Cube	TC Diagnosis SYSTEM	CLIMBING Solution	SAFETY Pack	Customization	ECO Mode	COMFORT Cabin	HIGH POWER Motors	JL25 Tower Crane Elevator	SMARTLINK BE SMART keep control




Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

(H) ESTACIONARIA 1 / STATIONARY 1

SR



ST-SR / ST-DR

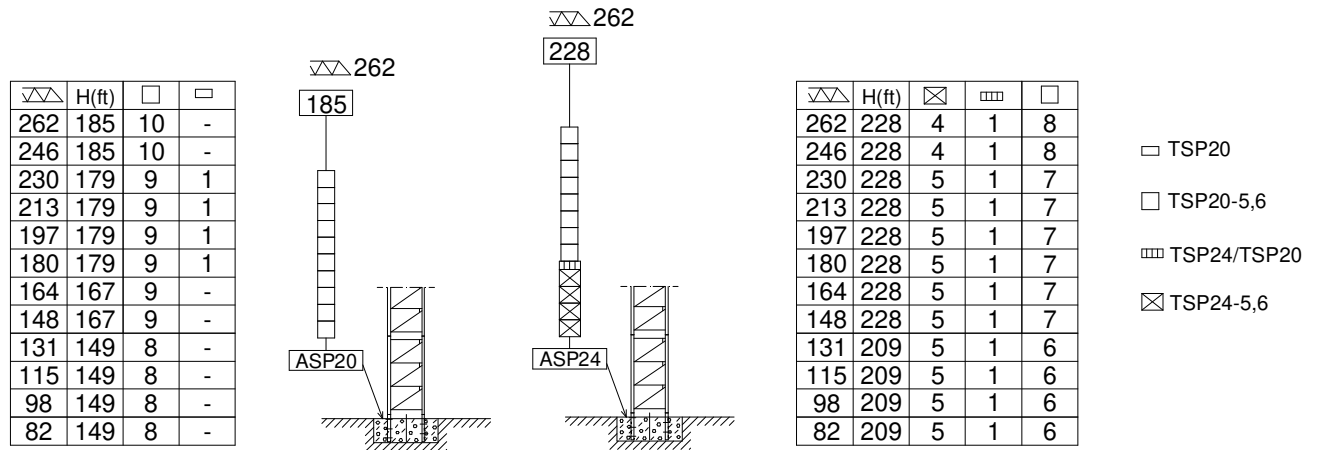


ASP20 ..... 212.21.200

ASP24 ..... 212.21.500



**SR - 70500 lb**



EXTRA Lift

	70500 lb @ ...(ft)	82	98	115	131	148	164	180	197	213	230	246	262	
262	112	70500	70500	68800	59400	52100	46200	41400	37400	34100	31200	28700	26500	
	115	70500	70500	70500	61600	54300	48500	43700	39700	36300	33400	30900	28700	+
246	116	70500	70500	70500	61500	53900	47900	42900	38800	35300	32400	29800	-	
	119	70500	70500	70500	63700	56200	50100	45200	41100	37600	34600	32000	-	+
230	121	70500	70500	70500	64700	56800	50400	45300	41000	37300	34200	-	-	
	125	70500	70500	70500	66900	59000	52600	47500	43200	39500	36400	-	-	+
213	125	70500	70500	70500	66800	58600	52100	46800	42300	38600	-	-	-	
	128	70500	70500	70500	68900	60800	54300	48900	44500	40700	-	-	-	+
197	126	70500	70500	70500	67700	59500	52900	47500	43000	-	-	-	-	
	130	70500	70500	70500	69900	61600	55000	49600	45000	-	-	-	-	+
180	129	70500	70500	70500	69100	60700	54000	48500	-	-	-	-	-	
	133	70500	70500	70500	70500	62800	56000	50500	-	-	-	-	-	+
164	136	70500	70500	70500	70500	64400	57300	-	-	-	-	-	-	
	140	70500	70500	70500	70500	66500	59200	-	-	-	-	-	-	+
148	143	70500	70500	70500	70500	68300	-	-	-	-	-	-	-	
	148	70500	70500	70500	70500	70400	-	-	-	-	-	-	-	+
131	131	70500	70500	70500	70500	-	-	-	-	-	-	-	-	
	131	70500	70500	70500	70500	-	-	-	-	-	-	-	-	+
115	115	70500	70500	70500	-	-	-	-	-	-	-	-	-	
	115	70500	70500	70500	-	-	-	-	-	-	-	-	-	+
98	98	70500	70500	-	-	-	-	-	-	-	-	-	-	
	98	70500	70500	-	-	-	-	-	-	-	-	-	-	+
82	82	70500	-	-	-	-	-	-	-	-	-	-	-	
	82	70500	-	-	-	-	-	-	-	-	-	-	-	+





Datos válidos para / Valid data for



H ≤ 230 ft





**CARGAS / LOADS**

**J1400**

 <b>ST-SR 70500 lb</b>		 ft												 <b>EXTRA Lift</b>
	70500 lb @ ...(ft)	82	98	115	131	148	164	180	197	213	230	246	262	
262	108	70500	70500	65400	56000	48700	42900	38100	34100	30700	27800	25300	23100	
	111	70500	70500	67700	58300	51000	45200	40400	36400	33000	30200	27600	25500	+
246	111	70500	70500	67800	58100	50600	44600	39600	35500	32000	29000	26500	-	+
	114	70500	70500	70100	60400	52900	46800	41900	37800	34300	31400	28800	-	+
230	116	70500	70500	70500	61300	53400	47100	41900	37600	34000	30900	-	-	+
	119	70500	70500	70500	63600	55700	49400	44200	39900	36300	33200	-	-	+
213	119	70500	70500	70500	63400	55300	48800	43500	39000	35300	-	-	-	+
	123	70500	70500	70500	65700	57500	51000	45700	41300	37500	-	-	-	+
197	121	70500	70500	70500	64400	56200	49600	44200	39700	-	-	-	-	+
	125	70500	70500	70500	66600	58400	51800	46400	41900	-	-	-	-	+
180	123	70500	70500	70500	65800	57400	50700	45200	-	-	-	-	-	+
	127	70500	70500	70500	68000	59600	52800	47300	-	-	-	-	-	+
164	130	70500	70500	70500	70000	61100	54000	-	-	-	-	-	-	+
	134	70500	70500	70500	70500	63200	55900	-	-	-	-	-	-	+
148	137	70500	70500	70500	70500	65000	-	-	-	-	-	-	-	+
	141	70500	70500	70500	70500	67000	-	-	-	-	-	-	-	+
131	131	70500	70500	70500	70500	-	-	-	-	-	-	-	-	+
	131	70500	70500	70500	70500	-	-	-	-	-	-	-	-	+
115	115	70500	70500	70500	-	-	-	-	-	-	-	-	-	+
	115	70500	70500	70500	-	-	-	-	-	-	-	-	-	+
98	98	70500	70500	-	-	-	-	-	-	-	-	-	-	+
	98	70500	70500	-	-	-	-	-	-	-	-	-	-	+
82	82	70500	-	-	-	-	-	-	-	-	-	-	-	+
	82	70500	-	-	-	-	-	-	-	-	-	-	-	+

**CARGAS / LOADS**

**J1400**

 <b>ST-DR 141100 lb</b>		 ft												 <b>EXTRA Lift</b>
	141100 lb @ ...(ft)	82	98	115	131	148	164	180	197	213	230	246	262	
262	55	90300	73200	61000	51900	44700	39000	34400	30500	27200	24400	22000	19800	
	55	92200	75100	62800	53600	46500	40700	36100	32200	28900	26100	23600	21450	+
246	57	93800	76100	63500	54100	46700	40800	36000	32000	28600	25700	23100	-	+
	57	95800	78100	65400	55900	48500	42600	37800	33800	30300	27400	24900	-	+
230	59	99100	80500	67300	57400	49600	43500	38400	34200	30600	27600	-	-	+
	60	101100	82500	69300	59300	51600	45400	40300	36100	32500	29400	-	-	+
213	61	102600	83500	69800	59500	51600	45200	40000	35600	32000	-	-	-	+
	62	104700	85500	71800	61600	53600	47200	42000	37600	34000	-	-	-	+
197	62	104300	84900	71100	60600	52600	46100	40800	36400	-	-	-	-	+
	63	106500	87000	73100	62700	54700	48200	42900	38400	-	-	-	-	+
180	64	106700	86900	72800	62200	53900	47300	41900	-	-	-	-	-	+
	65	108900	89100	74900	64300	56100	49400	44000	-	-	-	-	-	+
164	67	113600	92600	77600	66400	57700	50700	-	-	-	-	-	-	+
	68	115800	94800	79900	68600	59900	52900	-	-	-	-	-	-	+
148	71	120900	98700	82800	71000	61700	-	-	-	-	-	-	-	+
	72	123000	100900	85000	73100	63900	-	-	-	-	-	-	-	+
131	78	134300	109900	92400	79400	-	-	-	-	-	-	-	-	+
	79	136400	112000	94500	81400	-	-	-	-	-	-	-	-	+
115	78	134500	110100	92600	-	-	-	-	-	-	-	-	-	+
	80	136600	112100	94500	-	-	-	-	-	-	-	-	-	+
98	79	134700	110200	-	-	-	-	-	-	-	-	-	-	+
	80	136800	112000	-	-	-	-	-	-	-	-	-	-	+
82	80	136700	-	-	-	-	-	-	-	-	-	-	-	+
	81	138700	-	-	-	-	-	-	-	-	-	-	-	+

Datos válidos para / Valid data for

H ≤ 230 ft



 **FEM 1001**


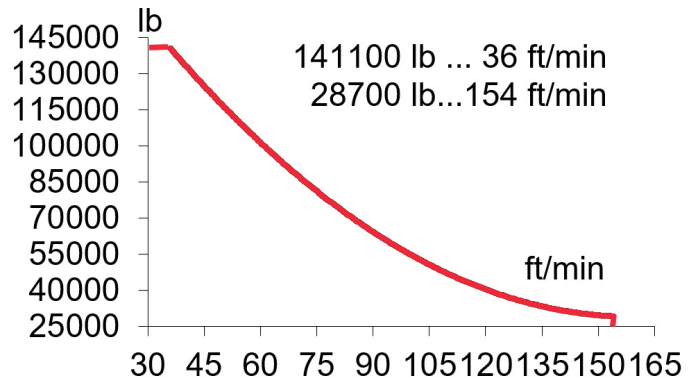
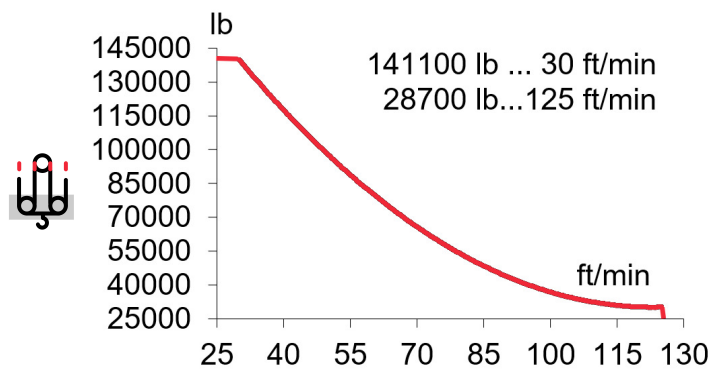
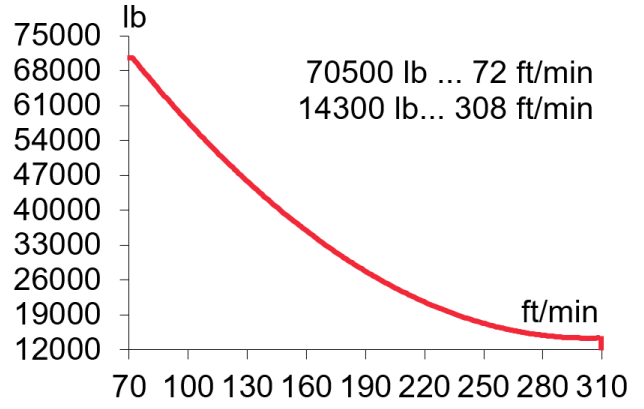
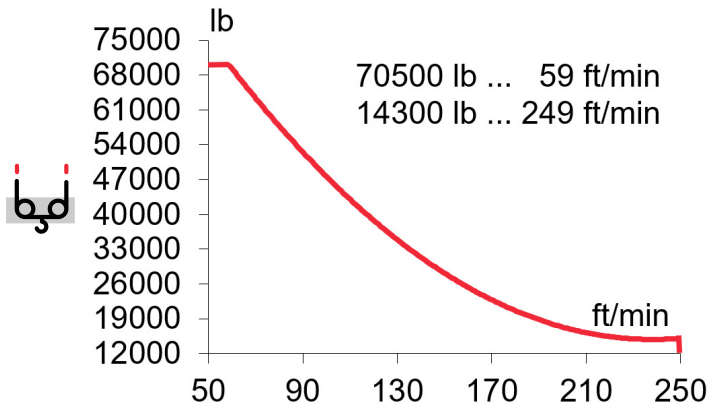


Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability



**EC15076VF**  
110 kW



**\* EC18094VF**  
132 kW



$H \leq$  SR 1496 ft  
DR 748 ft



**OG6007VF**  
3 x 15 kW














**TC3360VF**  
24,3 kW

0...0,7  
r/min  
sl/min

70500 lb 0...197 ft/min  
141100 lb 0... 98 ft/min









3~ 400V 50Hz  
480V 60Hz


KVA			
<b>EC15076VF</b>	134	161	187
<b>EC18094VF</b>	145	177	209

			L (ft)	A (ft)	H (ft)	P/W (lb)
Torre / Tower	TSP20		14.4	7.5	7.8	12380
	TSP20-5,6		20.2	7.5	7.8	16900
	TSP24-5,6		20.2	9.0	9.4	18290
Larguero largo, reducción Long crossbar, reduction	TSP24/TSP20		12.9	2.4	7.3	8430
Larguero corto reducción Short crossbar reduction	TSP24/TSP20		6.2	2.4	7.3	4120
Torre asiento pista + base punta de torre + orientación Slewing table + tower head base + slewing mechanism			17.0	8.0	8.3	47620
Punta de torre Tower head			18.3	7.3	7.3	16010
Tramo de pluma Jib section	PC22-11		35.7	7.6	8.7	19910
	PC22-12+tr		33.9	7.0	8.2	26900
	PC22-13		17.7	6.8	8.2	12430
	PC22-14		34.1	7.1	8.2	21300
	PC22-15		34.1	6.8	8.2	18080
	PPC22		4.0	7.7	9.6	1870
	PT22-16		34.0	6.8	8.1	9310
	PT22-17		33.9	6.8	8.1	7340
	PT22-18		33.9	6.8	8.1	5390
	PT22-19		17.5	6.8	8.1	3110
PPT22	4.0	7.7	9.6	1760		
Contrapluma Counterjib	CC18-1		24.6	7.1	3.7	12030
Contrapluma Counterjib	CC18-2		22.2	7.1	4.2	11010
Contrapluma Counterjib	CC18-3		17.9	6.9	2.2	5090
Contrapluma Counterjib	CC18-4		21.6	7.2	7.4	10690
Contrapluma + Mec. Elevación Counterjib + Hoisting Mech.	CC18-4 + EC		22.8	7.6	8.0	28600


**LISTA DE EMBARQUE / PACKING LIST**

**J1400**


		L (ft)	A (ft)	H (ft)	P/W (lb)
Polipasto Hook assembly	SR ST/DR			5.4	2920
				7.6	6440
Carro / Trolley	SR ST/DR			10.0	3460
				12.1	5690
Soporte y elevación (sin cable) Support and hoisting (without rope)				10.4	17910
Armario eléctrico y plataforma Electrical cabinet and platform				8.9	2090
Plataforma y cabina Platform and cabin				12.0	2450
Transporte torre de montaje Jacking cage transport	<p><b>TM20PASP-5.6</b> Package 1.</p> 		38.1	26270	
			<p>Package 2.</p> 		38.3
Contrapeso Counterweight	Lastre Ballast			12.5	13230
				12.5	6610
				12.5	4410

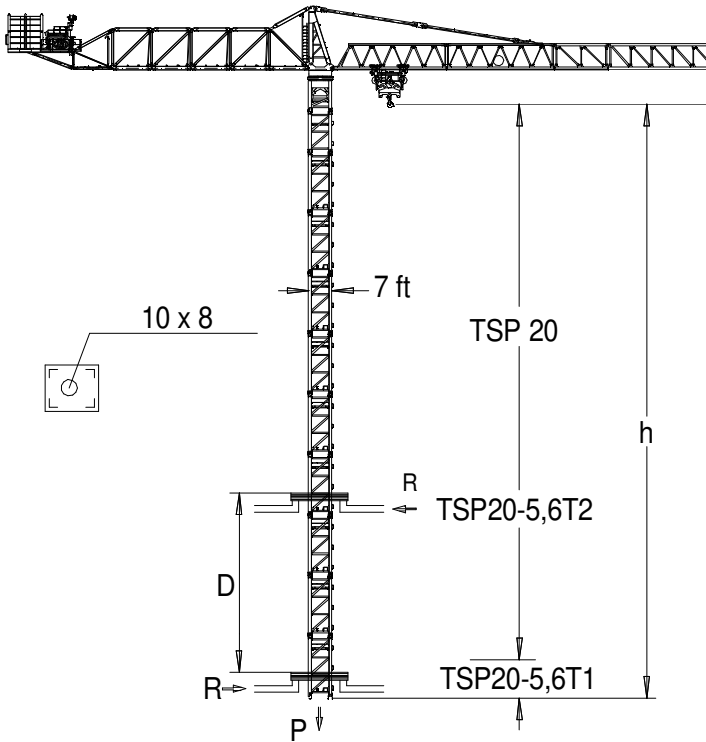

h<sub>max</sub>:  
TSP20-5,6T1 + 7 x TSP20-5,6 + TSP20-5,6T2 + TSP20

 197 ft	▶	■
h (ft)	179	
D (ft)	35 - 85	
P (lbf)	846410	702530
R <sub>max</sub> (lbf)	200080	340590

h<sub>max</sub>:  
TSP20-5,6T1 + 6 x TSP20-5,6 + TSP20-5,6T2

 131 ft	▶	■
h (ft)	149	
D (ft)	39 - 69	
P (lbf)	763230	619350
R <sub>max</sub> (lbf)	202330	293380

TSP20-5,6T1: 214.31.400  
TSP20-5,6T2: 214.31.600

 Trepado interno / Internal climbing

 Viento fuera de servicio / Out of service wind

 Consultar / Consult

▶ En servicio / In service

■ Fuera de servicio / Out of service

\* Opcional / Optional



Ctra./ Rd. Madrid – Irún - Km. 415 - 20213 IDIAZABAL (Gipuzkoa) - ESPAÑA / SPAIN  
P.O. Box, 23 - 20.200 - BEASAIN - E-mail: jaso@jaso.com  
Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20  
[www.jaso.com](http://www.jaso.com)

25/04/2025



FEM 1001

DELEGACIÓN / DEALER