

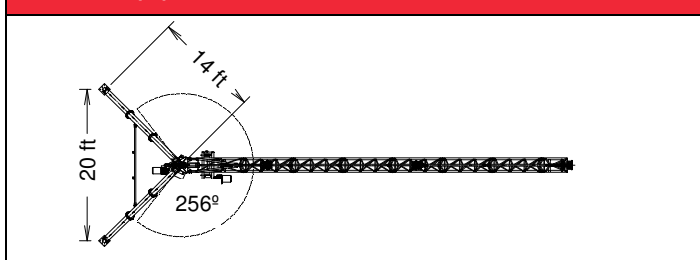
CARGAS / LOADS

J1920.DC

⚙ / ⚙		TD/2R (lb)	Cargas máximas / Maximum loads TD/2R (lb)		
 [ft]	2R 8800 lb [ft]	TD 4400 lb [ft]	Alcance del gancho [ft] / Hook reach [ft]		
			49	56	62
			4400	4400	4400
62		62			
56		56			-
49	49	49	8800	-	-
 [ft]	2R 6600 lb [ft]		Alcance del gancho [ft] / Hook reach [ft]		
		56	56	6600	6600

(H) ESTACIONARIA / STATIONARY









TRANSPORTE / TRANSPORT




















Transporte grúa completa / Transport of whole crane	
Caja marítima / Liftvan	
	9.5 x 7.4 x 7.4 ft – 880 lb Derrick – 10600 lb



124 mph	49 ft
109 mph	56 ft
96 mph	62 ft

CARACTERÍSTICAS DE MECANISMOS / MECHANISMS FEATURES
J1920.DC

*opcional *optional				
	EC1040VF 7,5 kW		OG604VF 2 x 2,2 kW	EP1015VF 7,5 kW
 lb ft/min	2200 0 ... 131	4400 0 ... 66	0...0,4 r/min sl/min	1,5 min
 lb ft/min	4400 0 ... 66	8800 0 ... 33		
 H ≤ TD 2R	1968 ft 984 ft	 2556 ft	 480V 60Hz AMPERAGE = 21 A	

LISTA DE EMBARQUE / PACKING LIST
J1920.DC

DENOMINACIÓN / DENOMINATION	L (ft)	A (ft)	H (ft)	P / W (lb)
Base punta de torre+orientacion / tower head base + slewing 	2.5	3.3	2.7	1130
Torre asiento pista / Slewing table 	1.3	2.2	2.2	260
Tramo de pluma - Torre / Jib section - Tower 	7.0	2.2	2.6	290
Tramo de pluma I / Jib section I 	6.9	1.9	2.2	200
Punta de pluma / Jib end 	3.9	1.9	4.5	295
Torre inferior / Lower tower 	6.9	1.9	2.2	230
Torre superior / Top tower 	3.6	1.9	2.2	115
Punta de torre / Tower head 	3.6	2.1	2.1	390
Puntal / Pillar 	6.4	-	1.1	205
	5.9	-	1.1	215
Plumín / Auxiliary jib 	11.0	-	1.6	130
Polipasto / Hook assembly 	1.2	1.3	2.9	420
Pasteca / Reeving block 	1.2	1.5	1.5	160
Larguero inferior / Lower crossbar 	13.1	-	1.0	115
Elevación carga / Hoisting 	4.2	4.1	1.8	941
Elevación pluma / Luffing 	1.9	3.9	1.8	617
Limitador sobrecarga / Overload limiter 	1.0	1.2	1.1	62
Armario electrico / Electrical cupboard 	1.2	2.1	3.2	198

	
124 mph	49 ft
109 mph	56 ft
96 mph	62 ft



Ctra./Rd. Madrid - Irún Km. 415 - 20.213 IDIAZABAL [Gipuzkoa] ESPAÑA / SPAIN
P.O. Box, 23 - 20.200 BEASAIN - E-mail: jaso@jaso.com

Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20 www.jaso.com

Fecha / Date: 26/09/2023

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada
Subject to modification, without prior notice. This information is supplied without liability

DELEGACION / DEALER